


# N2 SHC3STP C

## 1901 Shower Range 1901 Recessed Thermostatic Dual Control Shower Valve with Integral Twin Stopcocks Chrome

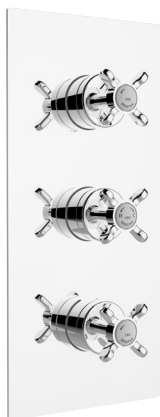

### Features:

- The 1901 Concealed Thermostatic Shower Valve in chrome combines classic elegance with practical design. Thermostatic technology maintains consistent water temperature, while a front-access cartridge allows easy maintenance.
- Easy installation with an adjustable faceplate that fits total wall depths from 45mm to 75mm for a perfect flush finish
- Save time on maintenance with a front-access cartridge for quick servicing
- Built to last with durable metal back plate and handle construction
- Built to last, backed by a lifetime parts and 1-year labour guarantee

### Product Certifications:



WRAS Certificate No: 250803004  
WRAS Expiry Date: 31/08/2030


For more products, visit our website:  
<http://www.bristan.com>



### Specification

|                                          |                                                     |
|------------------------------------------|-----------------------------------------------------|
| Finish/Colour:                           | Chrome Plated                                       |
| Main Construction Material:              | Brass                                               |
| No of Controls:                          | 3                                                   |
| Shower Type:                             | Recessed Dual Control                               |
| Valve/Cartridge Type:                    | Thermostatic Cartridge & 3/4" Ceramic Disc Valve    |
| Maximum Hot Water Supply Temperature °C: | 65                                                  |
| Plumbing System Suitability:             | Suitable for all plumbing systems, ideally balanced |
| Minimum Dynamic Pressure (bar):          | 0.2                                                 |
| Maximum Dynamic Pressure (bar):          | 5                                                   |
| Maximum Static Pressure (bar):           | 10                                                  |
| Connection Inlet:                        | 15mm Compression                                    |
| Connection Outlet:                       | 15mm Compression                                    |
| Isolation Valve Included:                | No                                                  |
| Check Valve Included:                    | Yes                                                 |

### Dimensions (measurements in mm)

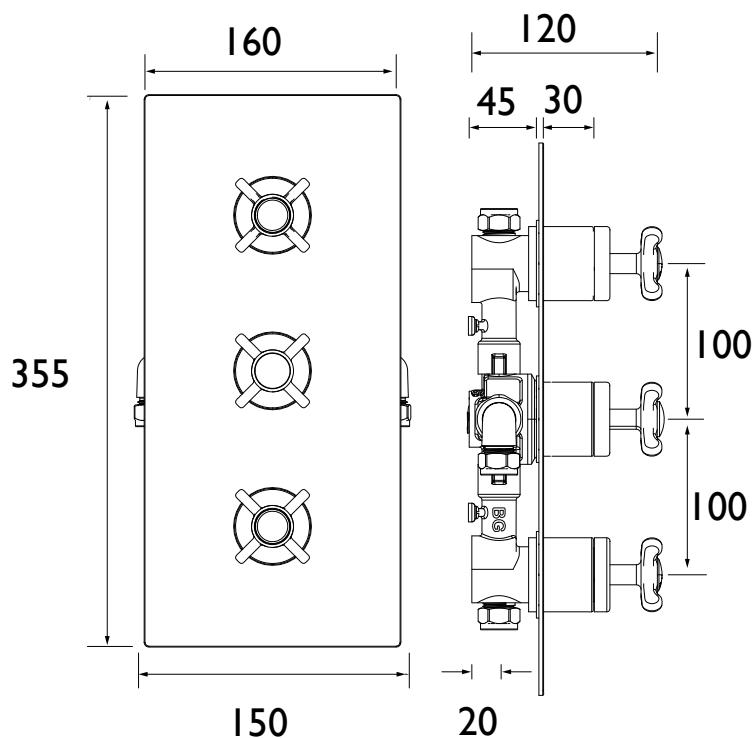

### Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5  | 1    | 2    | 3  | 5    |
|-----------------------|-----|------|------|------|----|------|
| Valve Only (mixed)    | 7.7 | 14.2 | 20.7 | 29.3 | 36 | 46.3 |

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D10