

# PM2 SHCVO C

## PRISM Shower Range Prism Recessed Thermostatic Dual Control Shower Valve Chrome



### Features:

- The versatile Prism Thermostatic Concealed Shower Valve in chrome combines dual-control functionality with a contemporary design that integrates seamlessly into modern bathrooms. Thermostatic temperature control with automatic shut-off protection ensures family-safe showering every time.
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Easy installation with an adjustable faceplate that fits total wall depths from 45mm to 75mm for a perfect flush finish
- Save time on maintenance with a front-access cartridge for quick servicing
- Built to last, backed by a lifetime parts and 1-year labour guarantee

### Product Certifications:




WRAS Certificate No: 2405900  
WRAS Expiry Date: 31/05/2029

### Specification

|                                          |                                                     |
|------------------------------------------|-----------------------------------------------------|
| Finish/Colour:                           | Chrome Plated                                       |
| Main Construction Material:              | Brass                                               |
| No of Controls:                          | 2                                                   |
| Shower Type:                             | Dual Control                                        |
| Valve/Cartridge Type:                    | Thermostatic Cartridge & 3/4" Ceramic Disc Valve    |
| Maximum Hot Water Supply Temperature °C: | 65                                                  |
| Plumbing System Suitability:             | Suitable for all plumbing systems, ideally balanced |
| Minimum Dynamic Pressure (bar):          | 0.2                                                 |
| Maximum Dynamic Pressure (bar):          | 5                                                   |
| Maximum Static Pressure (bar):           | 10                                                  |
| Connection Inlet:                        | 15mm Compression                                    |
| Connection Outlet:                       | 15mm Compression                                    |
| Isolation Valve Included:                | No                                                  |
| Check Valve Included:                    | Yes                                                 |

### Dimensions (measurements in mm)

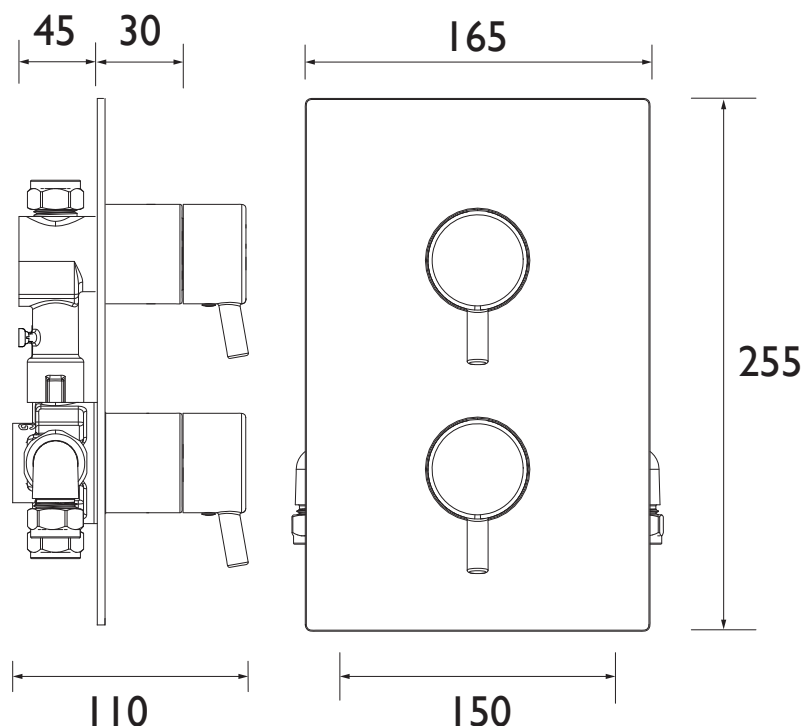

### Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5  | 1  | 2    | 3    | 5    |
|-----------------------|-----|------|----|------|------|------|
| Valve Only (mixed)    | 7.5 | 14.1 | 21 | 30.5 | 37.4 | 48.2 |

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D9

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.