

RS2 SHCDIV C

RENAISSANCE Shower Range

Renaissance 2 Recessed Dual Control
Shower With Two Outlet Diverter Chrome



Features:

- Enjoy peace of mind with the Renaissance Concealed Dual-Control Shower in polished chrome, featuring a 42°C safety stop with override and automatic shut-off protection if water supply fails. Installation is simple with an adjustable faceplate that fits wall depths from 50mm to 75mm for a perfect flush finish, while dual controls let you manage temperature and flow with precision across two outlets.
- Save time on maintenance with a front-access cartridge for quick servicing
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Easy installation with an adjustable faceplate that fits total wall depths from 50mm to 75mm for a perfect flush finish
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 250603004
WRAS Expiry Date: 30/06/2030

Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control
Valve/Cartridge Type:	35mm Thermostatic Cartridge & 40mm Integral Diverter
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

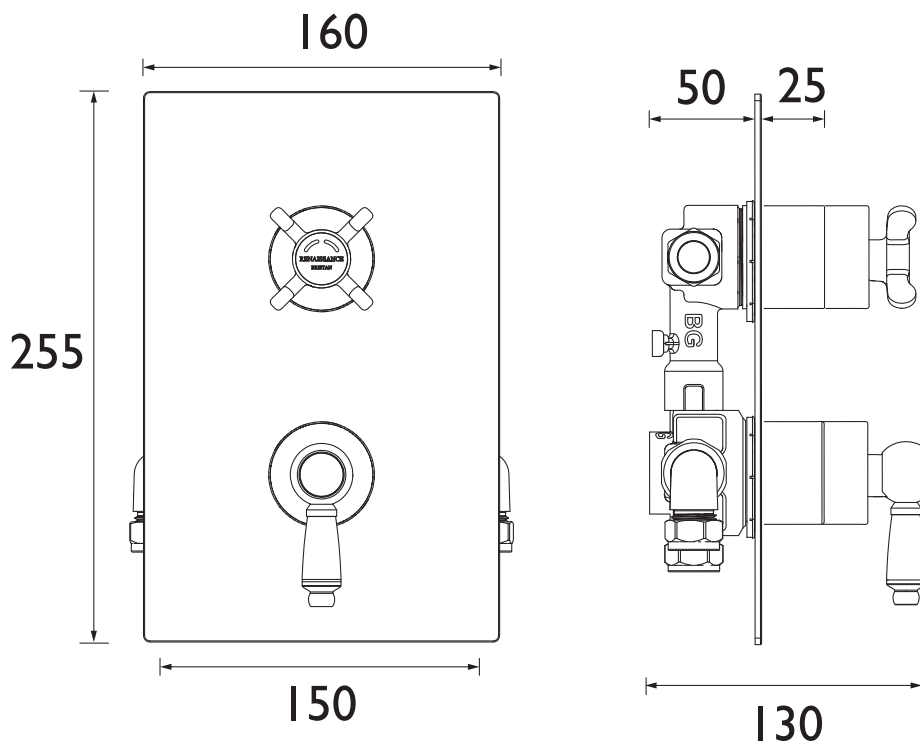

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	8.5	13.4	19	26.9	32.9	42.5

TECHNICAL
DATA
SHEET



BRISTAN

D6

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.