


RS2 SHCVO C

RENAISSANCE Shower Range

Renaissance 2 Recessed Thermostatic Dual Control
Shower Valve Chrome

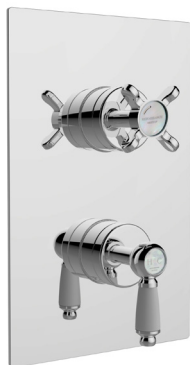

Features:

- Perfect for traditional bathrooms, the Renaissance Concealed Thermostatic Valve in polished chrome delivers classic style with modern safety. Enjoy a 42°C safety stop with override, automatic shut-off if water supply fails, and easy installation with an adjustable faceplate for a flush finish. Maintenance is simple with front-access servicing, while separate flow and temperature controls give you precise control over your shower experience.
- Save time on maintenance with a front-access cartridge for quick servicing
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Easy installation with an adjustable faceplate that fits total wall depths from 45mm to 75mm for a perfect flush finish
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 2405900
WRAS Expiry Date: 31/05/2029

Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control
Valve/Cartridge Type:	35mm Thermostatic Cartridge & 3/4" Ceramic Disc Valve - 1/4 turn
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

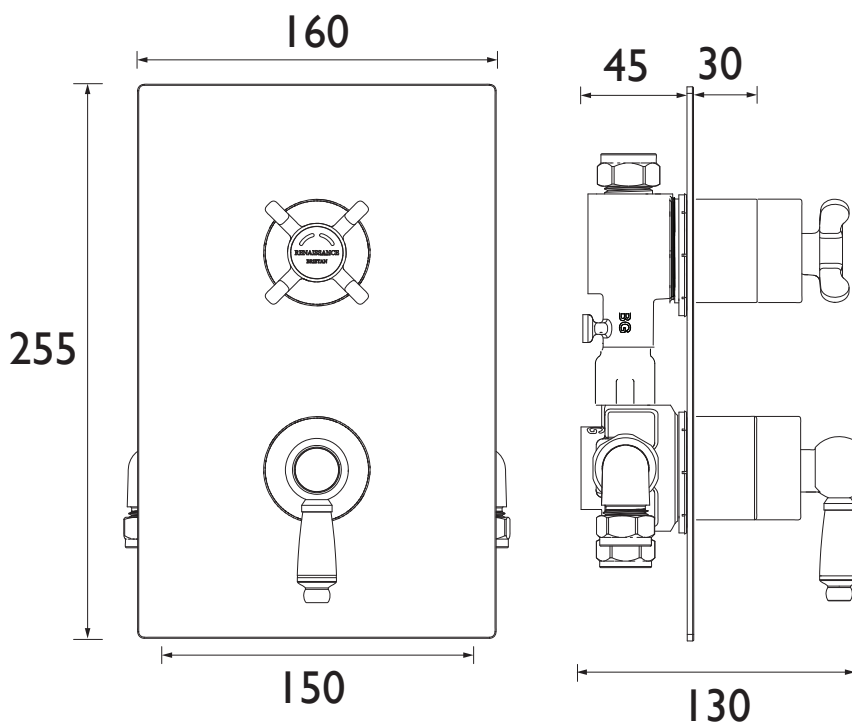

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	9.4	14.9	21	29.7	36.4	47

TECHNICAL
DATA
SHEET



BRISTAN

D6