



### Features:

- The curvaceous Hourglass Thermostatic Concealed Shower Valve in dual control chrome plated finish brings refined style to modern bathrooms. Its two-outlet diverter switches between drench head and handset while the front-access cartridge design allows for simple maintenance.
- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish
- Save time on maintenance with a front-access cartridge for quick servicing
- Switch effortlessly between handset and drench head with the integrated diverter
- Built to last, backed by a lifetime parts and 1-year labour guarantee

### Product Certifications:




WRAS Certificate No: 250603301  
WRAS Expiry Date: 30/06/2030

### Specification

|                                          |                                                      |
|------------------------------------------|------------------------------------------------------|
| Finish/Colour:                           | Chrome Plated                                        |
| Main Construction Material:              | Brass; ABS                                           |
| No of Controls:                          | 2                                                    |
| Shower Type:                             | Dual Control                                         |
| Valve/Cartridge Type:                    | 35mm Thermostatic Cartridge & 40mm Integral Diverter |
| Maximum Hot Water Supply Temperature °C: | 85                                                   |
| Plumbing System Suitability:             | Suitable for all plumbing systems, ideally balanced  |
| Minimum Dynamic Pressure (bar):          | 0.2                                                  |
| Maximum Dynamic Pressure (bar):          | 5                                                    |
| Maximum Static Pressure (bar):           | 10                                                   |
| Connection Inlet:                        | 15mm Compression                                     |
| Connection Outlet:                       | G 1/2"                                               |
| Isolation Valve Included:                | No                                                   |
| Check Valve Included:                    | Yes                                                  |

### Dimensions (measurements in mm)

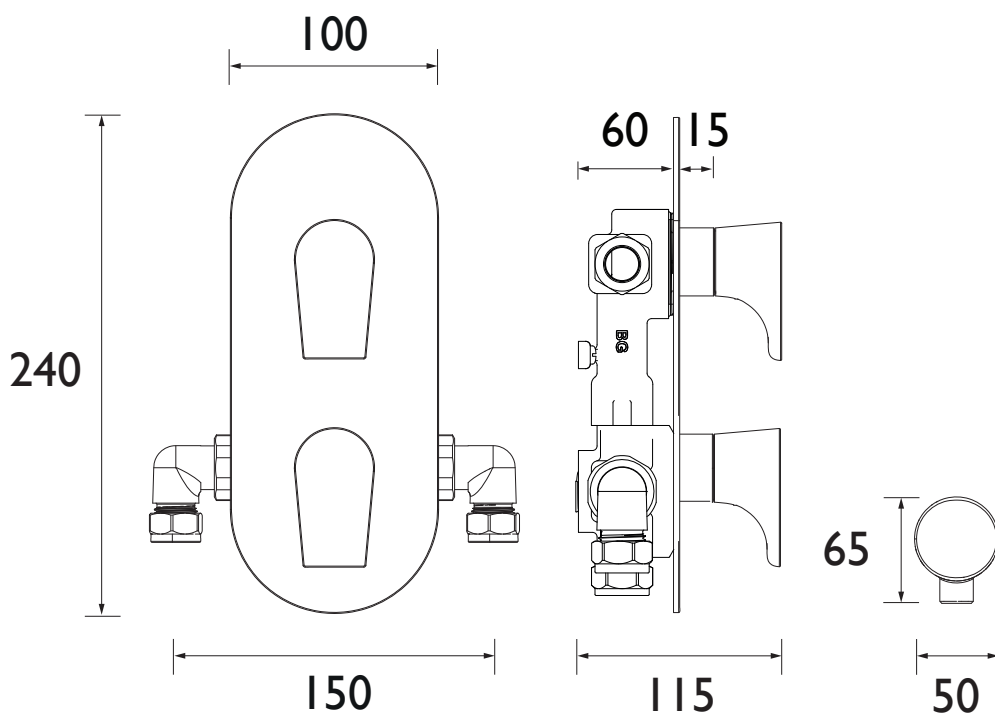

### Flow Rates (l/min)

| System Pressure (bar)         | 0.2 | 0.5  | 1   | 2    | 3    | 5    |
|-------------------------------|-----|------|-----|------|------|------|
| Valve Only/Largest FR (mixed) | 8.5 | 13.4 | 19  | 26.9 | 32.9 | 42.5 |
| With Flow Limiters (mixed)    | NPD | 7.2  | 9.8 | 10.4 | 9.9  | 10.2 |

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D11