

# PM2 SQSHCVO C

## PRISM Shower Range Prism Concealed Sequential Chrome Shower Valve Only



### Features:

- The versatile Prism Thermostatic Single-Control Shower Valve in chrome delivers reliable temperature control with integrated safety features. Family-safe thermostatic technology maintains your preferred temperature, while flow regulators support eco-conscious showering.
- Save water without compromising performance thanks to two built-in 8L flow regulators
- Easy installation with an adjustable faceplate that fits total wall depths from 48.5mm to 72mm for a perfect flush finish
- Supplied with Easyfit wall outlet
- Built to last, backed by a lifetime parts and 1-year labour guarantee

### Product Certifications:




WRAS Certificate No: 2206907  
WRAS Expiry Date: 30/06/2027

### Specification

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| Finish/Colour:                           | Chrome Plated                     |
| Main Construction Material:              | Brass                             |
| No of Controls:                          | 1                                 |
| Shower Type:                             | Concealed Sequential              |
| Valve/Cartridge Type:                    | Thermostatic Sequential Cartridge |
| Maximum Hot Water Supply Temperature °C: | 65                                |
| Plumbing System Suitability:             | Suitable for all plumbing systems |
| Minimum Dynamic Pressure (bar):          | 0.2                               |
| Maximum Dynamic Pressure (bar):          | 5.0                               |
| Maximum Static Pressure (bar):           | 10                                |
| Connection Inlet:                        | 15mm Compression                  |
| Connection Outlet:                       | G1/2"                             |
| Isolation Valve Included:                | No                                |
| Check Valve Included:                    | Yes                               |

### Dimensions (measurements in mm)

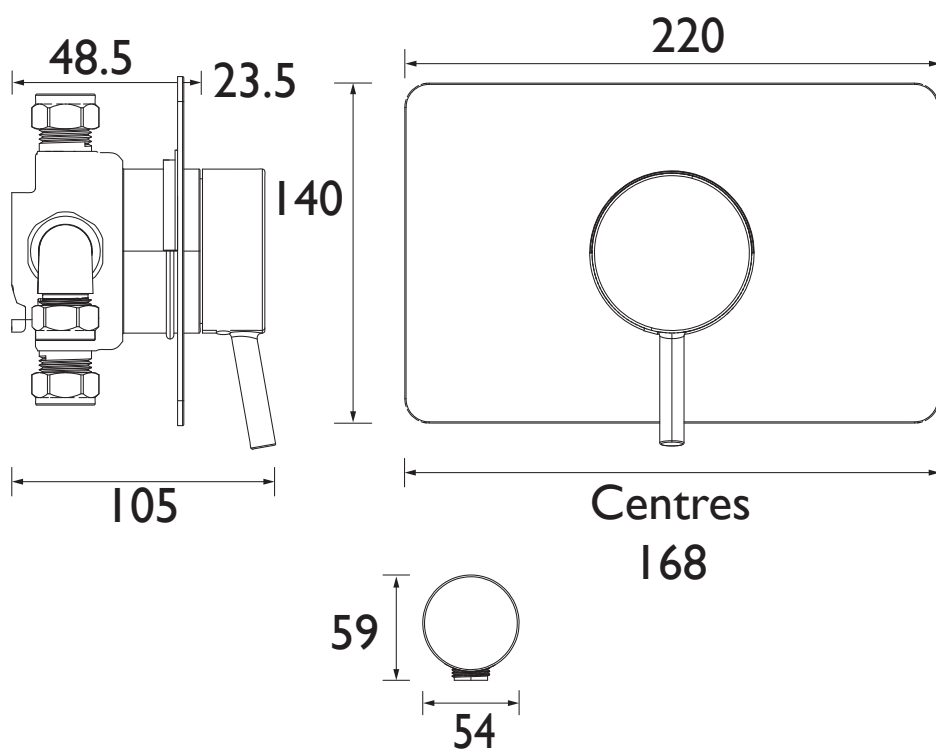

### Flow Rates (l/min)

| System Pressure (bar)         | 0.1 | 0.5  | 1    | 2    | 3    | 5    |
|-------------------------------|-----|------|------|------|------|------|
| With Flow Limiters (mixed)    | 2.2 | 3.2  | 7    | 10.1 | 12.3 | 12.1 |
| Without Flow Limiters (mixed) | 6.3 | 19.5 | 27.6 | 39.0 | 47.8 | 61.7 |

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D7

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.