

COB SHC3STP C

COBALT Shower Range Cobalt Thermostatic Recessed Dual Control Shower Valve with Integral Twin Stopcocks Chrome



Features:

- Make a bold statement with the Cobalt two-outlet concealed shower valve in polished chrome, featuring integral twin stopcocks for instant isolation of hot and cold supplies. It also includes a unique floating plate design, adjustable for wall depths of 60mm to 75mm, ensuring a perfectly flush finish.
- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish
- Easy maintenance thanks to integral twin stopcocks that let you isolate hot and cold supplies instantly
- Save time on maintenance with a front-access cartridge for quick servicing
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 250803004
WRAS Expiry Date: 31/08/2030

Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Recessed Dual Control
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
Minimum Dynamic Pressure:	0.2 bar
Maximum Dynamic Pressure:	5.0 bar
Maximum Static Pressure: (bar)	10
Maximum Hot Water Supply Temperature °C:	65
Pre-set Outlet Temperature °C:	42
Plumbing System Suitability:	Suitable for all plumbing systems
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

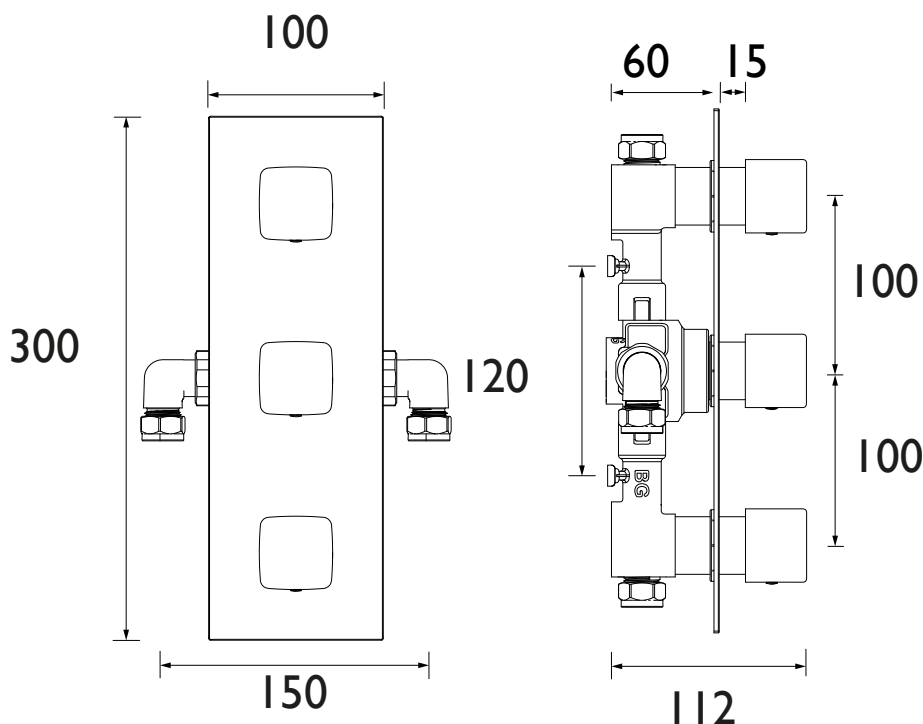

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	7.7	14.2	20.7	29.3	35.9	46.3
Outlet 2	7.3	14	20.8	29.4	36	46.5

TECHNICAL
DATA
SHEET



BRISTAN

D9