CAP BF C

CAPRI Tap Range Capri Pillar Bath Filler Chrome



Specification				
Product Type:	Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M28 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4 Ceramic Disc Vlaves 1/4 Turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			


Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Easy-to-use lever handles
- Chrome plated to BS EN 248

Product Certifications:



WRAS Cert. Number: 2205901 WRAS Expiry Date: 31/05/2027 Dimensions (measurements in mm)

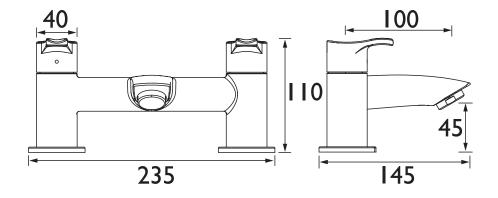

For more products, visit our website: http://www.bristan.com



Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
CAP BF C (mixed)	27.2	45.3	64.9	91.8	112.4	145.1		

TECHNICAL DATA SHEET



