ALP SHWR PK

ALP Tap Range Alp Shower Pack Complete



Features:


- Integral two outlet diverter
- 250mm round slimline fixed
- head with shower armSingle function bar handset

Product Certifications:

• 33 I/min

and hose with integral handset holder and wall outlet

Specification	
Product Type:	Mixer Shower
Main Construction Material:	Brass. ABS
Connection Inlet:	15mm Compression
Connection Outlet:	G ½"
Number of Controls:	2
Flow Control Valve Type:	40mm Diverter Cartridge
Plumbing System:	Suitable for all plumbing systems
Minimum Dynamic Pressure: (Bar)	0.2 Bar
Maximum Dynamic Pressure: (Bar)	5.0 Bar
Maximum Static Pressure: (Bar)	10
Maximum Hot Water Temperature: (°C)	65
Pre-set Outlet Temperature: (°C)	42
Isolation Included:	No
Check Valve Supplied:	Yes
Shower Kit:	Adjustable Riser with Fixed Head

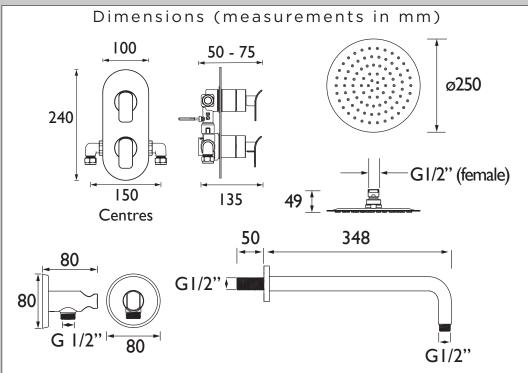

Flow Rates (I/min)

0.2

7.6

4.06

7.4

0.5

13.2

6.4

12.9

For more products, visit our website: http://www.bristan.com



OP QUALIAL SU YEARS LE



1

16.9

9.1

16.5

2

24

9.4

23.4

3

33

9.8

28.6

5

38

10.3

37

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

System Pressure (bar)

Fixed Head No Flow Reg.

Fixed Head with Flow Reg.

Handset No Flow Reg.

Handset with Flow Reg