

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces. All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

As gold and special effect finishes are softer than chromium plate, special care must be taken when cleaning, a 3 year guarantee covers these finishes.

NOTE: The 5-year guarantee on the cartridge is invalidated if damaged by any waterborne debris.

In the interests of continuous product development we reserve the right to alter specification as necessary

PRODUCT CODE: CLTBAS C/CLTBAS CB

PRODUCT IDENTIFICATION CODE LASER ETCHED ON PRODUCT
Installer please fill in code here _____.

TELEPHONE HELP LINE: 0844 701 6273

Bristan group Ltd
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company
Web Site: www.bristan.com
Telephone: +44 (0) 844 701 6274
Facsimile: + 44 (0) 844 701 6275
Email: enquire@bristan.com

(Rev. D2)

BRISTAN

Chill Tall Basin Mixer

Fitting Instructions & Contents List



Please keep these instructions for future reference and request of replacement part

WATER PRESSURE

This mixer is suitable for use at all supply pressures. However for optimum use both the hot and cold supplies should be reasonably balanced.

If the fitting is installed at low pressure (tank fed), then the minimum distance from the outlet of the nozzle to the underside of the cold tank should be 3.0 metres to ensure adequate performance.

This mixer should be installed in compliance with Water Regulations. Where the supplies are unbalanced, i.e. hot water from the cylinder tank / cold from the mains, approved check valves must be fitted in the supply pipes.

For further details contact your Local Water Authority.

INSTALLATION


1. Identify all components and check for completeness, particularly before arranging fitting.
2. Fit extension piece (2) onto the body (1) if not pre-assembled.
3. Fit the mixer body assembly (1 & 2) to the basin using the 'C' plate fixing kit and plinth. The plinth (3) and foam washer (4) go between the fitting and the basin, and the 'C' shaped rubber (6) and metal washers (7) on the underside of the basin, to be secured by the nut (8) and threaded rod (5).
4. Fit the inlet pipes (9) to the fitting and connect the hot and cold supplies.
5. Fully open the mixer letting it run for a few minutes, check all joints and connections for leaks.
6. See over the page for aftercare instructions.

MAINTENANCE

If the fitting begins to drip:

1. Turn off the water supply.
2. Lift lever (a) into the 'on' position and loosen visible grub screw (b).
3. Pull off lever and then main part of handle (c).
4. Using suitable tool (28 mm A/F), remove cartridge retaining nut (d).
5. Carefully clean cartridge (e), seal and seating.
6. Replace components and turn on the water supply.
7. Contact our helpline if problem persists.

INSTALLATION DIAGRAM

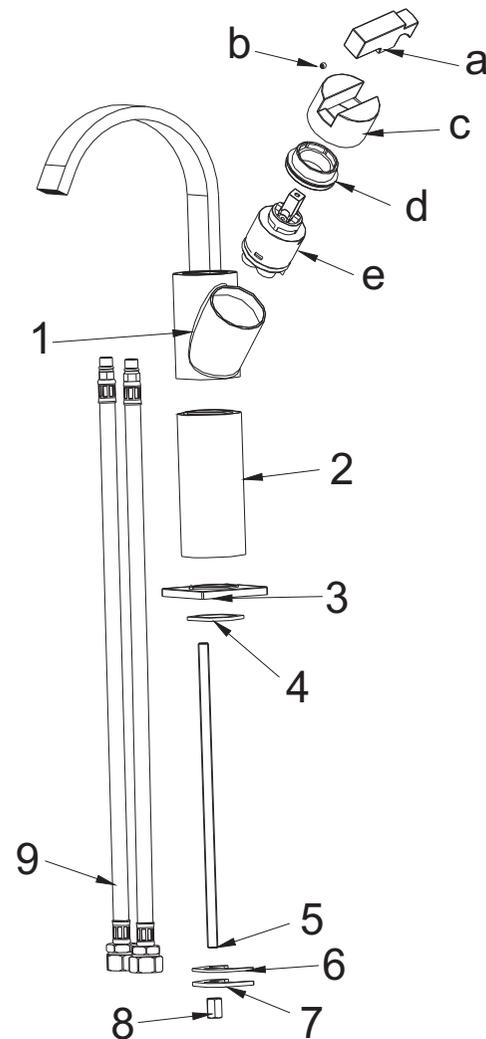

CONTENTS:

- | | | |
|----|------------------------|------|
| 1. | Mixer Body | (x1) |
| 2. | Extension piece | (x1) |
| 3. | Plinth | (x1) |
| 4. | Foam washer | (x1) |
| 5. | Threaded rod | (x1) |
| 6. | C-shaped rubber washer | (x1) |
| 7. | C-shaped metal washer | (x1) |
| 8. | Nut | (x1) |
| 9. | Inlet pipe | (x2) |

Please Note: -

In the unlikely event you find a part missing please contact our Customer Service Help line on 0844 701 6273 or email enquire@bristan.com for immediate despatch of part.