

## **AFTERCARE INSTRUCTIONS**

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting, even the non-scratch cleaners. **NOTE: Never use abrasive detergents or disinfectants or those containing alcohol, hydrochloric acid or phosphoric acid.**

Bristan recommend E-Cloth for cleaning all of our bathroom & kitchen products. Using just water, E-cloth gives a smear free, deep clean by breaking up and holding dirt, which normal cloths leave behind. Order through your Bristan stockist. (ORDER CODE: ECLOTH)



## **GUARANTEE**

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

**NOTE: The 5-year guarantee on the cartridge is invalidated if damaged by any waterborne debris.**

**All products must have access for servicing or replacement during the life of the product.**

In the interests of continuous product development we reserve the right to alter specification as necessary

## **PRODUCT CODE:**

**PRODUCT IDENTIFICATION CODE LASER ETCHED ON PRODUCT**  
Installer please fill in code here \_\_\_\_\_.(Where applicable)

TELEPHONE HELPLINE! +44 (0)844 701 6273

Bristan Group Limited  
Birch Coppice Business Park  
Dordon  
Tamworth  
Staffordshire  
B78 1SG  
UK

A Masco Company  
Website: [www.bristan.com](http://www.bristan.com)  
Telephone: +44 (0) 844 701 6274  
Facsimile: +44 (0) 844 701 6275

# BRISTAN

## **Qube Tall Basin Mixer Without Pop-up Waste**

## **Fitting Instructions & Contents List**

**Please keep these instructions for future reference and request of replacement part**


## WATER PRESSURE

This mixer is suitable for use at all supply pressures. However for optimum use both the hot and cold supplies should be reasonably balanced.

If the fitting is installed at low pressure (tank fed), then the minimum distance from the outlet of the nozzle to the underside of the cold tank should be 1.8 metres to ensure adequate shower performance.

This mixer should be installed in compliance with the Water Regulations. Where the supplies are unbalanced, i.e. hot water from cylinder tank/cold from the mains, approved check valves must be fitted in the supply pipes.

For further details contact your Local Water Authority.

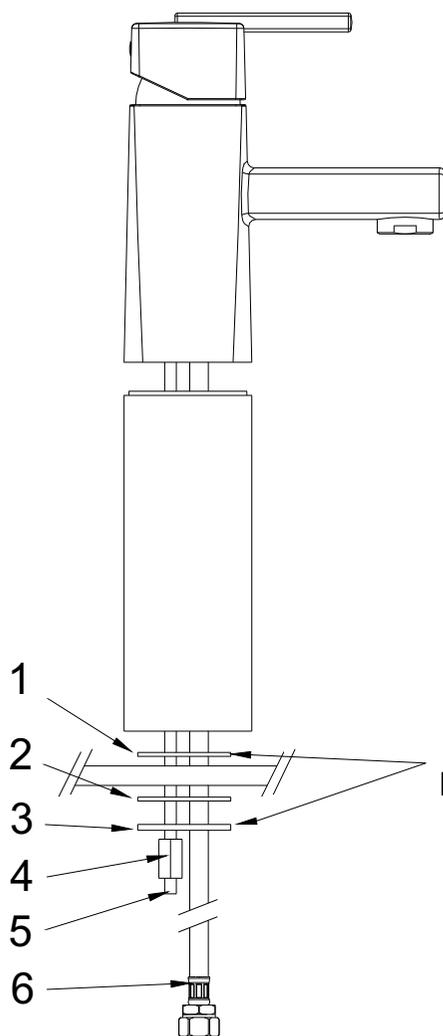

## CONTENTS

- |                           |      |
|---------------------------|------|
| 1. Full rubber washer     | (x1) |
| 2. C-shaped rubber washer | (x1) |
| 3. C-shaped metal washer  | (x1) |
| 4. Nut                    | (x2) |
| 5. Threaded rod           | (x2) |
| 6. Flexible tail pipes    | (x2) |

## 'C' PLATE FIXING KIT

## INSTALLATION

1. Identify all components and check for completeness, particularly before commencing installation.
2. Fit the mixer body and extension tube to the basin, using the 'C' plate fixing kit. The full rubber washer (1) goes between the fitting and the basin and the 'C' shaped rubber (2) and metal washers (3) on the underside of the basin, to be secured by the nuts (4) and the threaded rods (5).
3. Fit the flexible tail pipes (6) to the inside of the fitting connect the hot and cold supplies. **DO NOT OVERTIGHTEN (BY HAND ONLY).**
4. Fit the flexible tail pipes (6) to the inside of the fitting and connect the hot and cold supplies.
5. Fully open the mixer in the mid position, letting them run for a few minutes and check all joints and connections for leaks.
6. See back page for aftercare instructions.

**N.B. Please write the name and product code of your fitting in the spaces provided overleaf. This will ensure a speedier service if you should need to phone the help line.**

## MAINTENANCE

### If the fitting begins to drip:

1. Isolate water supplies.
  2. Prise out handle cap, loosen grub screw and lift off the handle.
  3. Unscrew shroud and brass retaining plate and lift out the cartridge complete with seal.
  4. Clean or replace cartridge, clean and grease seal and refit.
- NOTE: That there are locating pins on the bottom of the cartridge that fit in holes inside the tap, to ensure it is fitted the right way around.**
5. Refit the handle and tighten the grub screw. Replace the handle cap.
  6. If problem persists contact our helpline quoting the product code.

### PLEASE NOTE:

In the unlikely event you find a part missing, please contact our Customer Service helpline on **0844 701 6273** for immediate dispatch of part