AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting, even the non-scratch cleaners. **NOTE:** Never use abrasive detergents or disinfectants or those containing alcohol, hydrochloric acid or phosphoric acid.

At Bristan, we want to make things as easy as possible for our customers.

That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

To start your free guarantee, simply scan the QR code and register your product. Alternatively, visit

www.bristan.com/register to register your product via a computer

For full guarantee terms and conditions visit, www.bristan.com/guarantees









Surface Mounted Pipework Fittings (WMNT4 C)

Fitting Instructions & Contents List

Before starting any installation project please consider:



Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes with the aid of an electronic detector. If you use power tools do not forget:

- Wear eye protection
- Unplug equipment after use

INSTALLATION

- 1. Identify all components and check for completeness, particularly before commencing installation.
- 2. Determine correct orientation and position for a bar shower or wall mounted mixer, by measuring the pipe centres. Once determined the position, mark out the holes ready for the shrouds (2).
- 3. Drill holes to match the holes in the shrouds (2), then use the wall plugs if required. Screw the shrouds (2) to the wall by using the screws provided.

Before starting any installation project please consider:



Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes with the aid of an electronic detector. If you use power tools do not forcet:

- Wear eye protection
- Unplug equipment after use
- 4. Attach the wall mounts to the shrouds by screwing them together. The wall mount can be positioned, so that pipework can come from the floor or from the ceiling.
- 5. These fittings are for exposed units only,
- 6. See back page for aftercare instructions.





ILLUSTRATION ONLY

INSTALLATION DIAGRAM

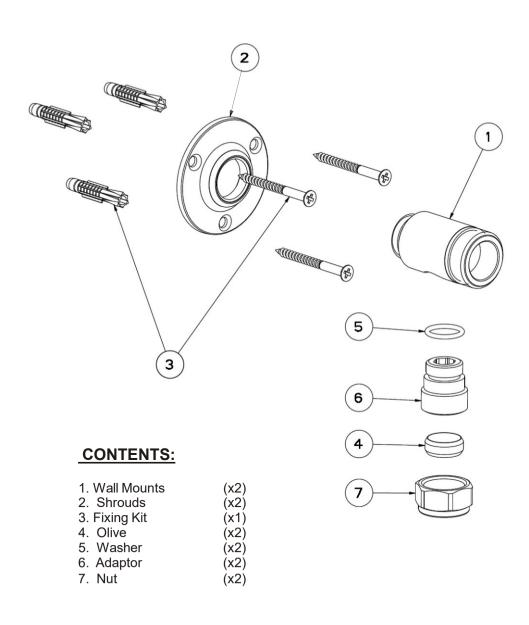

PLEASE NOTE:

In the unlikely event you find a part missing, please contact our Customer Service helpline on **0330 026 6273** for immediate dispatch of part