

Tools required:



Parts supplied:




Maintenance & Cleaning

The mirror edges are treated with a specially formulated sealant designed to protect the mirror edges from contaminants and discolouring. Failure to follow cleaning guidelines can/will remove the benefits of the sealant.


1 - 2

NEVER use products containing bleach, cleaners of a gritty or abrasive nature or so called "glass and mirror" cleaning products, that can be detrimental to the long lasting finish of the mirror.


ONLY use a clean dry or damp micro fibre cloth to clean the mirror and mirror frame.

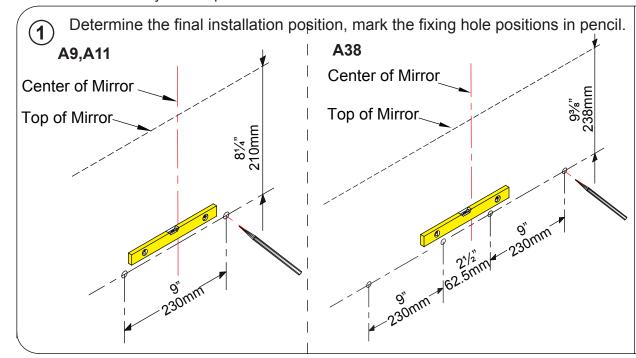

Using a 8mm drill bit, drill holes on the marked positions. (note: In the event that the wall / floor fixings supplied being inappropriate for the wall / floor, please source alternatives).

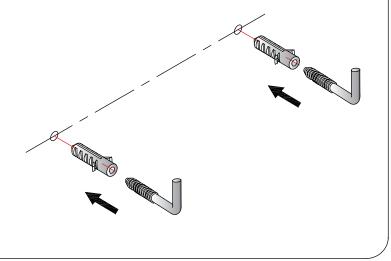



(3) Keep the stainless screw exposed 8mm outside the wall. Mount the mirror onto the wall by hunging the bracket of mirror onto the exposed screws.

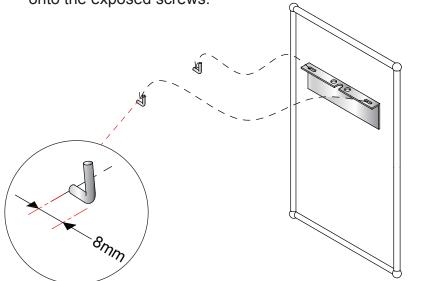

Check if it is stable.

If not please readjust the exposed length of screws and use the washers supplied if needed.

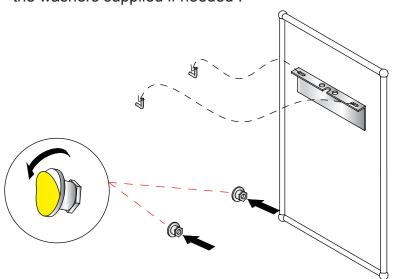

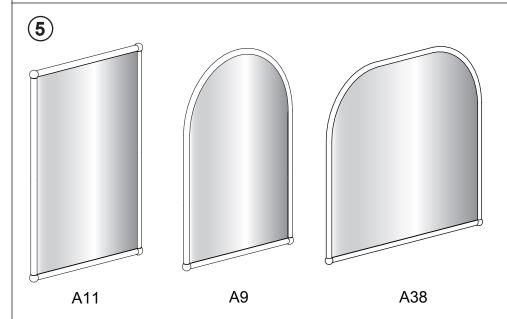

For further information contact;

US:

Crosswater London, 393 Fortune Blvd., Milford, MA 01757 Toll free number: 844-XWATER-1 (844-992-8371)

Tel: 508-381-0433 fax: 508-381-6068 Email: technical@crosswaterlondon.com Web: www.crosswaterlondon.com

UK:

Bathroom Brands, Lake View House, Rennie Drive, Dartford, Kent, DA1 5FU

Tel: 01322 473222

E-mail: <u>Customerservice@bathroombrands.com</u>

Web: www.bathroombrands.com