

Datasheet

FP975 Electronic 7-Day Programmer

Application



The FP975 7-day full programmer offers all the control flexibility and user features of its counterpart, FP715, in the regular Mk18 range, but with two important differences:

- 1) This unit is intended specifically to replace, or upgrade systems with, Danfoss Randall Mk.9 time controls. They have British Gas Standard wallplates which are used by many other models, including the Danfoss Randall SET range, the Horstmann 425 Diadem and Tiara, and their 525 and 527 models.

- 2) This model has voltage-free output contacts, making it applicable to systems with low voltage control circuits, e.g. combination boilers or warm air.

The unit is supplied with a SET wallplate but, simply by re-positioning a small switch on the back, interchangeability is achieved with Mk.9 controls.


Replace models 922 & 972 With FP975

The FP975 is supplied as a full 7-day control, but the installer can easily and quickly convert it to a weekday/weekend or 24 hour unit if preferred.

- British Gas Standard wallplate provides interchangeability with other popular time controls
- Total control flexibility
- Easy Programming
- Stylish, compact design
- Easy change to Weekday/Weekend control
- Easy GMT/BST time change
- Day programme copy facility
- AM/PM or 24 hour clock display
- Up to 3 Ons/Offs each day
- Built-in, ready-to-use programmes
- Battery back-up

Systems

FP975 Heatshare System (mid-position valve)

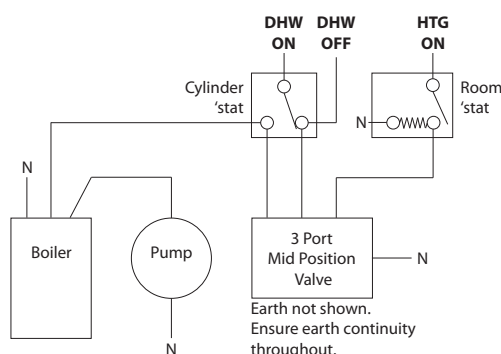

The FP975 will plug on to the wallplates of both Danfoss Randall Mk.9 and SET time controls.


When used on an existing correctly wired MK.9 wallplate, no wiring changes need to be made but the small switch on the back of the new unit should be re-positioned as shown overleaf.

For SET replacement, no such adjustment is necessary.

Mains			DHW			HTG		
922 or 972	OFF	COM	ON	OFF	COM	ON		
SET5	ON	COM	OFF	ON	COM	OFF		
E	N	L	1	2	3	4	5	6

Links


FP975 Heatplan System (2x2 port valves)

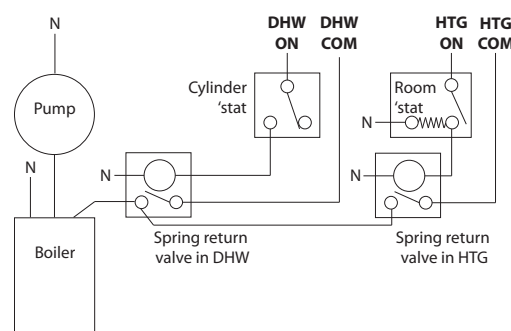

Mains			DHW			HTG		
922 or 972	OFF	COM	ON	OFF	COM	ON		
SET5	ON	COM	OFF	ON	COM	OFF		
E	N	L	1	2	3	4	5	6

Links

Features	FP975 Full Programmer	
7-day, 5-day/2-day or 24 hour	•	
Water/Heating linkable for basic systems	•	
Output Channels	Independent HW and CH	
Programmes Selectable	On Off Auto All day (per channel)	
Factory pre-set ON/Off times All changeable	Weekdays 6:30am ON 8:30am OFF 12:00pm ON 12:00pm OFF 5:00pm ON 10:30pm OFF	Saturday & Sunday 7:00am ON 10:00am OFF 12:00pm ON 12:00pm OFF 5:00pm ON 10:30pm OFF
Ons and Offs per day	Up to 3	
Advance Override	Per channel	
+1 Hour Override	Per channel	
Voltage Rating	220/240 Vac, 50 Hz	
Contact Rating	3 (1) A	
Switching Action	2 x SPDT Voltage Free	
Maximum Ambient Temperature	45°C	
Memory back-up	Lithium - minimum of 24 hours	
Dimensions	150 wide x 99 high x 42 deep	



*Please note:
Operating mode switch at factory setting,
ie. for new installation or for direct replacement of SET range.*