


MAKU COOL TO TOUCH BAR SHOWER

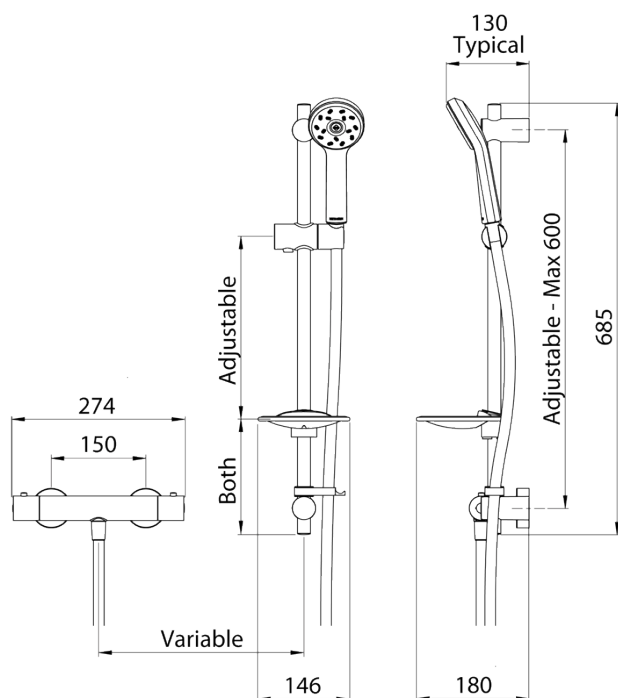

CONSTRUCTION: Brass & ABS

SUPPLY: Suitable for all plumbing systems

INLET CONNECTIONS: 15mm Compression

WORKING PRESSURES: 0.35 - 5.0 bar

CARTRIDGE/VALVE TYPE: Thermostatic

- 38°C temperature hot stop with override facility
- Safe cool to touch body
- Eco flow control with override facility
- Includes easy fit connections
- Includes Maku Satinjet Handset
- Riser rail features adjustable brackets - ideal for retrofit
- Supplied with 9l/min flow regulator

MCTS

Open Outlet Flow (Bar - l/min)

BAR	0.3	0.5	1.0	2.0	3.0	4.0	5.0
HANDSET FLOW	6.7	8	9	9	9	9	9

Chrome & Graphite



1604083



Please Note: Flow rate will be dictated by installation configurations.
Please ensure to check the appropriate flow restrictor information if applicable.

*Please refer to website for full warranty details.

BC1600/0415

FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM

methven.com

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.