


WAIPORI SHOWER HEAD

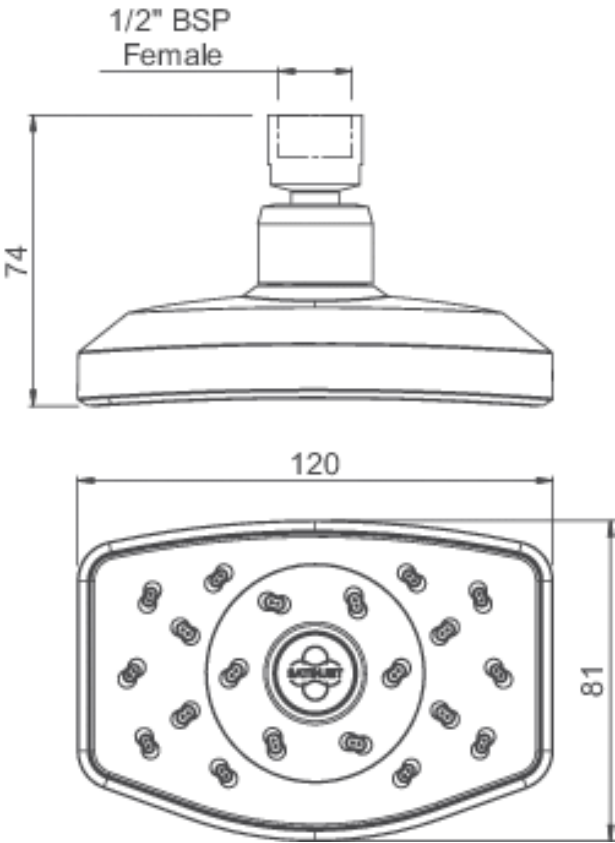

CONSTRUCTION: ABS

SUPPLY: Suitable for all plumbing systems

INLET CONNECTIONS: 1/2" BSP

WORKING PRESSURES: 0.35 - 5.0 bar

CARTRIDGE/VALVE TYPE: N/A

- Supplied with 9 l/min flow regulator
- Swivel joint
- Water efficient without compromising performance
- Satinjet® technology twin jets of water collide into thousands of tiny droplets to deliver voluminous shower coverage

WASRCPUK

Open Outlet Flow (Bar - l/min)

| BAR | 0.3 | 0.5 | 1.0 | 2.0 | 3.0 | 4.0 | 5.0 |
|--------------|-----|-----|-----|-----|-----|-----|-----|
| HANDSET FLOW | 8 | 9.3 | 9 | 9 | 9 | 9 | 9 |



1905015



Chrome & Graphite

Please Note: Flow rate will be dictated by installation configurations.
Please ensure to check the appropriate flow restrictor information if applicable.
*Please refer to website for full warranty details.

FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM

methven.com

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.