

Page 1

Installation should be carried out by a qualified installer and in compliance with Water Regulations, for further details please contact your local water authority.

It is recommended that inlet pressures are as balanced as possible to provide optimum performance from your product.

Always turn off or isolate the water supply, before commencing the work.

Installation details

Before commencing installation of the new product, ensure that the system has been flushed to remove any debris, which can damage the seating washer of the valve.

Before fitting to the sink install the spout, if not already fitted, do this by removing the screw to rear of mixer, insert spout so that the gap in the plastic collar is located where the screw will enter the mixer, do not tighten the screw onto the plastic collar, fit screw and tighten (see above Fig 1).

If not already fitted, place the base washer over the tap tails.

Then place the tap through the tap hole, ensuring to fit the cold tap to the cold supply, which should be to the right, with the screw to the rear.

Screw on the back nuts, tighten using a spanner, but do not over tighten as this may damage the unit.

Depending on the connection method, washer and nut or compression nut and olive, connect the water

pipe and nut to the tap tail and tighten using a spanner

If nut and olive, place the nut over the pipe and then the olive, insert pipe into tap tail and connect nut, tighten until secure.

If nut and washer, place the washer inside the nut and connect the nut to the tap tail and secure (Do not use the old washer if it is damaged or in poor condition).

When fully tightened, turn on water supply and check for leaks.

Page 2

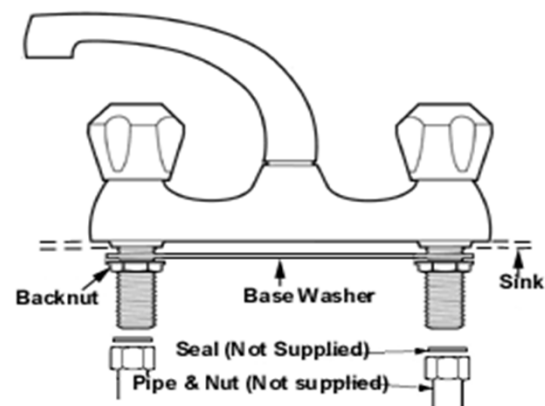


Fig 1

Water Saving

The fitting of the in tail regulator must be done prior to tap installation.

The regulator should be pushed inside the tap tail, with the black rubber ring facing downwards.



Front Page

Deck Sink Mixer
Installation and
Maintenance Guide



Please retain this document for future reference.

This product should be fitted in compliance with Water Regulations, by a qualified plumber.

Use only a clean damp cloth to maintain the surface finish, use of abrasive cleaning materials will invalidate your guarantee.

Customer Care Line
0800 1951602

Website
www.deva.org.uk

English Street
Lancashire
WN73EH