

Warranty Information

Proof of purchase will be required.

The guarantee does not cover faults or damage caused by incorrect installation and/or maintenance, ordinary wear and tear, water composition, etc.

*Please see www.deva-uk.com for full terms and conditions of warranty

Cleaning

Your product has a high-quality finish and should be treated with care to preserve the visible surfaces. Never use abrasives or abrasive cleaning agents to clean this product clean regularly with contamination free warm water and a damp soft cloth. Do not use products containing chlorine bleach or hydrochloric acid as these can damage the product.

We have a policy of continuous improvement and reserve the right to change specifications without notice.

METHVEN UK LIMITED
METHVEN EXPERIENCE CENTRE
3/3A STONE CROSS COURT
YEW TREE WAY
GOLBORNE
WARRINGTON
WA3 3JD
UNITED KINGDOM
INST-AVSH001-V2
22.04.2021

TEL: 0800 195 1602
FAX: 0844 406 8690
EMAIL: sales@uk.methven.com
www.deva-uk.com
www.methven.com

Anti-Vandal Shower Head

AVSH001

Installation Guide

Technical Specification

Inlet Connections:

15mm Copper

Features:

- Sturdy Brass Construction and Compact Rounded Shape For Both Style And Durability.
- Suitable For Sports Centers, Public Facilities etc
- 9LPM Flow Regulator Available, FRAV 9



Congratulations on your purchase of your new Deva Anti-Vandal Shower Head. Our fitting instructions have been created with you in mind to provide you with all the information you require and, if you need any further help, please don't hesitate to contact our customer care team on 0800 195 1602.


Please keep these instructions for future reference and request of replacement parts

General Safety Information

Please read all of the instructions before installation. Methven recommends this product is installed by a competent person in compliance with all relevant regional regulations. Remove all packaging and check the components for damage before starting installation. This product must not be modified in any way as this will invalidate the guarantee. It is the responsibility of the installer to ensure a waterproof seal is achieved, after installation all connections must be checked for leaks. All outlets used primarily for personal hygiene shall deliver water at a safe temperature as per regional regulations.

Installation Requirements

Before commencing installation of the new product, ensure that the system has been flushed to remove any debris, which could cause damage to the valves and invalidate the warranty.

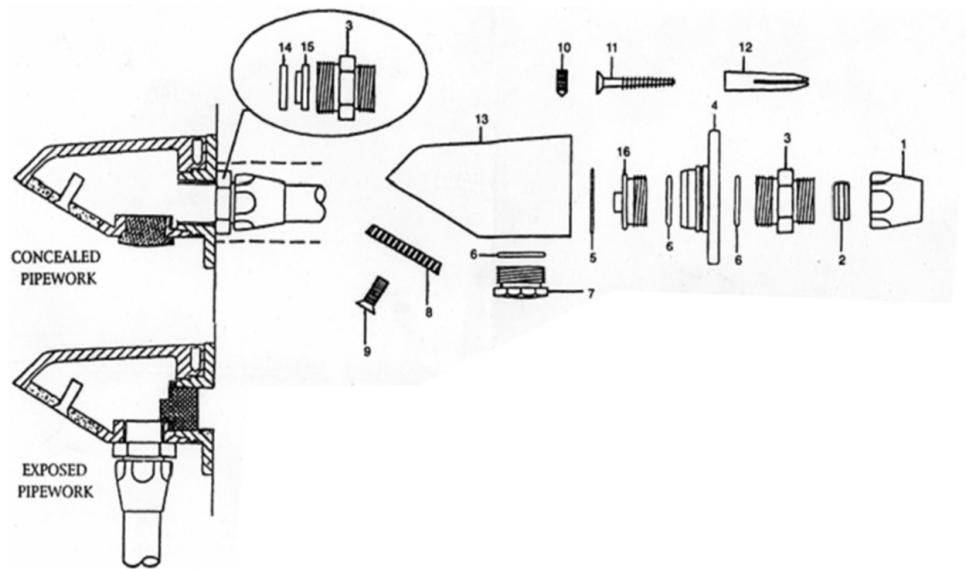

Installation

CONCEALED:

Attach fittings (1) TO (6) to pipework and secure to wall with screws and plugs (11 & 12) ensuring all connections are tightened. Fit blanking plug (7) with O-Ring into hole on underside of body. ENSURE ALL CONNECTIONS ARE TIGHTENED AND ARE WATER TIGHT

EXPOSED;

Fit blanking plug (16) with O-Ring to front of backplate (4) as shown. Attach shower head to pipework and mark out position of backplate on wall, remove fixed body (13) and fix backplate to wall using screws and plugs (11 & 12). Replace body and secure using grub screw (10) Tighten nut (1) to pipework. ENSURE ALL CONNECTIONS ARE TIGHTENED AND ARE WATER TIGHT

Economy Flow

WHEN AN AVSH001 IS INSTALLED WITH A TIME FLOW CONTROL, WE RECOMMEND THAT A 9 L/MIN FLOW LIMITER IS FITTED TO LIMIT THE FLOW TO APPROX 9 L/MIN.

THE FLOW LIMITER (15 – AS SHOWN ABOVE) IS PLACED INTO THE INLET ADAPTOR (3) AND SECURED WITH THE RETAINING RING (14)

FLOW LIMITERS INCLUDING PARTS (14 & 15) ARE NOT INCLUDED WITH YOUR PRODUCT AS STANDARD AND ARE TO BE PURCHASED SEPERATELY