


## Geberit remote flush actuation type 70 for dual flush, for Omega concealed cistern

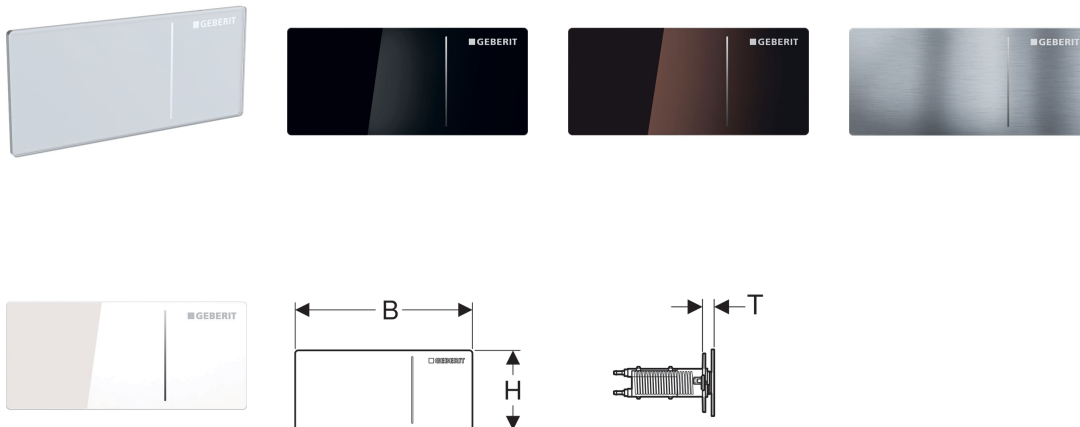

### Application purposes

- For solid and drywall construction
- For covering thicknesses of 5–50 mm in drywall construction
- For wall thicknesses of  $\geq 75$  mm in solid construction
- For tiled floor constructions of 5–40 mm
- For pneumatic remote flush actuation of Geberit concealed cisterns
- For Geberit Omega concealed cisterns 12 cm
- For flush actuation with high actuating convenience
- Not suitable for public and semipublic areas

### Characteristics

- Low-noise lifting mechanism
- Hydraulic servo lifter for minimum actuation forces

- Flush actuation pneumatic
- Can be combined with Geberit cover plates Omega

### Technical data

Flow pressure	1-3 bar
Actuation force	< 10 N

### Scope of delivery

- Hydraulic servo lifter
- Water supply connection set
- Pneumatic hose, length 2 m
- Flush-mounting box with protection cover
- Conduit pipe, length 1.7 m
- Installation accessories
- Fastening material

Art. no.	Surface / colour	Material designation	B	H	T
115.090.SI.1	white	Glass	11.2 cm	5 cm	0.9 cm
115.090.SJ.1	black	Glass	11.2 cm	5 cm	0.9 cm
115.090.SQ.1	umber	Glass	11.2 cm	5 cm	0.9 cm
115.090.FW.1	brushed, easy-to-clean coated	Stainless steel	11.2 cm	5 cm	0.9 cm



- FOR DOMESTIC USE ONLY
- NOT SUITABLE FOR SPECIAL PLATING
- Minimum 1 bar mains constant flow pressure