


Geberit urinal flush control with pneumatic flush actuation, flush plate type 10

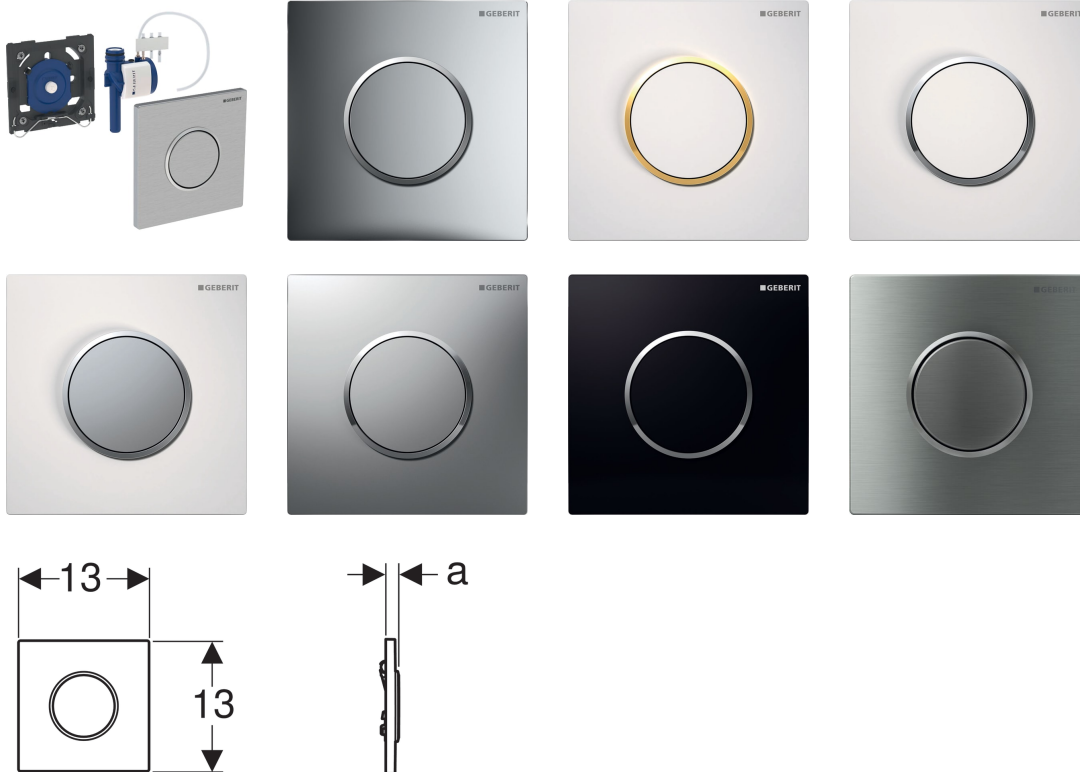

Application purposes

- For manual flush actuation of urinals
- For Geberit frames for urinal with front actuation
- For installation in installation sets for Geberit urinal flush controls (from year of manufacture 2009)

Characteristics

- Flush plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush actuation when the actuator button is released
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set

Technical data

Flow pressure	1-8 bar
Maximum test pressure, water	16 bar
Maximum test pressure, air / inert gas	3 bar
Relative humidity	< 100 %
Maximum operating temperature, water	30 °C
Actuation force	< 12 N
Flow rate at 1 bar without flow limiter	0.3 l/s
Flow rate at 1 bar with flow limiter	0.24 l/s
Calculated flow rate	0.3 l/s
Minimum flow pressure for calculated flow rate	1 bar
Flush time, adjustment range	4/8/12 s

Scope of delivery

- Flush plate type 10
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Surface / colour	Material designation	a
116.015.KH.1	Plate and button: gloss chrome-plated Design ring: matt chrome-plated	Plastic	1.3 cm

Art. no.	Surface / colour	Material designation	a
116.015.KJ.1	Plate and button: white Design ring: gloss chrome-plated	Plastic	1.3 cm
116.015.KK.1	Plate and button: white Design ring: gold-plated	Plastic	1.3 cm
116.015.KL.1	Plate: white Design ring and button: matt chrome-plated	Plastic	1.3 cm
116.015.KM.1	Plate and button: black Design ring: gloss chrome-plated	Plastic	1.3 cm
116.015.KN.1	Plate and button: matt chrome-plated Design ring: gloss chrome-plated	Plastic	1.3 cm
116.015.SN.1	Plate and button: brushed Design ring: polished	Stainless steel	1.1 cm



- Can be operated with used water (rainwater) provided it is passed through a filter system first