


## Geberit WC flush control with electronic flush actuation, mains operation, for Sigma concealed cistern 12 cm, dual flush, with Sigma10 actuator plate, automatic / touchless

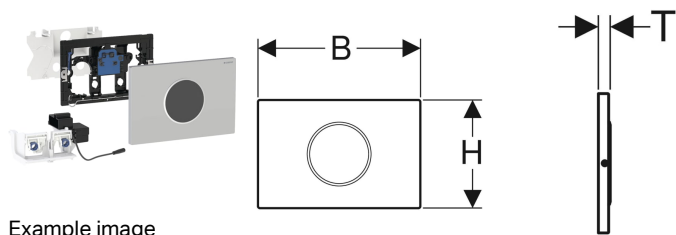

Example image

### Application purposes

- For private and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for less-abled installation

### Characteristics

- Touchless manual flush actuation
- Automatic flush actuation
- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Flush actuation possible via external push-button
- Power supply via external power supply unit
- Transformation of mains voltage to extra-low voltage, 12 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- With push-fit connection with cross-polarity protection
- Infrared user detection with background fade-out
- Self-adjusting IR sensor
- Reliable IR distance detection
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Device settings and operation with mobile device via integrated Bluetooth® interface

### Scope of delivery

- Sigma10 flush plate
- Mounting frame with infrared control, premounted

- Compatible with Geberit Control App
- Wired networkable with Geberit gateway via GEBUS converter
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Flush actuation can be deactivated
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating
- Easy maintenance and cleaning

### Technical data

Protection degree	IP45
Nominal voltage	85–240 V AC
Operating voltage	12 V DC
Mains frequency	50–60 Hz
Power consumption standby	0.15 W
Interval flush, adjustment range min.	1–168 h
Interval flush, factory setting	24 h
Interval flush time, adjustment range	1–200 s
Interval flush time, factory setting	5 s
Detection time, adjustment range	1–60 s
Detection time, factory setting	7 s

### To order additionally

- Geberit Power & Connect box
- Geberit power supply unit for Power & Connect box

Art. no.	Colour / surface	Material designation	B	H	T	Power consumption
115.907.KH.6	Plate: gloss chrome-plated Design rings: matt chrome-plated	Plastic	24.6 cm	16.4 cm	1.5 cm	≤ 4 W
115.907.KJ.6	Plate: white Design rings: gloss chrome-plated	Plastic	24.6 cm	16.4 cm	1.5 cm	≤ 4 W
115.907.KK.6	Plate: white Design rings: gold-plated	Plastic	24.6 cm	16.4 cm	1.5 cm	≤ 4 W
115.907.KM.6	Plate: black Design rings: gloss chrome-plated	Plastic	24.6 cm	16.4 cm	1.5 cm	≤ 4 W
115.907.SN.6	Plate: brushed, easy-to-clean- coated Design rings: polished	Stainless steel	24.6 cm	16.4 cm	1.5 cm	≤ 4 W

Art. no.	Colour / surface	Material designation	B	H	T	Power consumption
115.907.16.6	Plate: black matt-coated, easy-to-clean- coated Design ring: black	Stainless steel	24.6 cm	16.4 cm	1.5 cm	≤ 4 W
115.907.DW.6	Plate: black Design ring: matt black	Stainless steel	24.6 cm	16.4 cm	1.5 cm	≤ 4 W
115.907.JQ.6	Plate: matt chrome-coated, easy-to-clean coated Design ring: gloss chrome-plated	Plastic	24.6 cm	16.4 cm	1.5 cm	≤ 4 W

#### Accessories

- Geberit Service Handy