


Geberit Omega60 flush plate for dual flush, surface-even

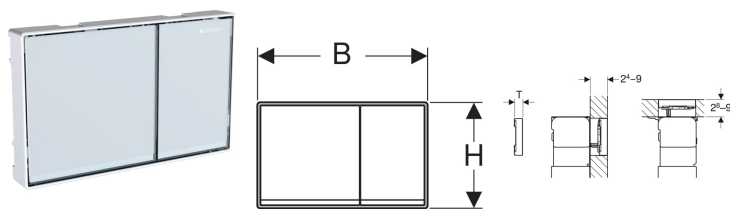

Example image

Application purposes

- For flush actuation with Omega concealed cisterns
- For covering thicknesses 24–90 mm (front actuation)
- For covering thicknesses 28–90 mm (top actuation)

Characteristics

- Top/front actuation
- Surface-even actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

Scope of delivery

- Compensation frame
- 2 spacers
- 2 distance bolts
- 2 actuator rods
- Fastening material

Art. no.	Colour / surface	Material designation	B	H	T
115.081.SI.1	Buttons: white Design stripes: mirrored Frame: gloss chrome-plated	Die-cast zinc / glass	18.4 cm	11.4 cm	2.5 cm
115.081.SJ.1	Buttons: black Design stripes: mirrored Frame: gloss chrome-plated	Die-cast zinc / glass	18.4 cm	11.4 cm	2.5 cm
115.081.GH.1	Buttons: chrome-plated, brushed, easy-to-clean coated Design stripes and frame: gloss chrome-plated	Die-cast zinc	18.4 cm	11.4 cm	2.5 cm
115.081.JK.1	Plate: lava Design stripes: mirrored Frame: gloss chrome-plated	Die-cast zinc / glass	18.4 cm	11.4 cm	2.5 cm
115.081.JL.1	Plate: sand grey Design stripes: mirrored Frame: gloss chrome-plated	Die-cast zinc / glass	18.4 cm	11.4 cm	2.5 cm

Accessories

- Geberit cover frame for Omega60 flush plate