


Geberit Option Plus Square illuminated mirror with direct and indirect lighting

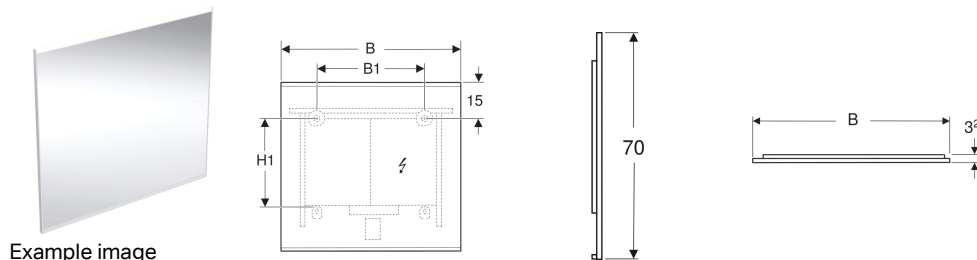

Characteristics

- Suitable for all bathroom series
- LED lighting
- Direct and indirect lighting, continuously dimmable
- Touch sensor switch for lighting, with orientation light
- With memory function for the lighting
- Orientation light can be deactivated
- Heated rear to prevent mirror steaming up
- Touch sensor switch for mirror heating, with red indication light
- Automatic switch-off of the antimist heating after 30 minutes

Technical data

Protection degree	IP44
Protection class	I
Nominal voltage	220-240 V AC
Mains frequency	50/60 Hz
Operating voltage	24 V DC
Product material	Aluminium
Light source energy efficiency class	F
Service life of LED lighting	>72'000 h L70B50
Light colour	3000 K
Colour rendering index	>80
Standard deviation of colour matching	3 SDCM

Scope of delivery

- Mirror
- Fastening material

Art. no.	Colour / surface	B	B1	H	H1	T	Power consumption	Power consumption of mirror heating	Luminous flux (max. / above / below)	Luminous flux, above	Luminous flux, below	
502.780.00.1	aluminium anodised	40 cm	20 cm	70 cm	46.5 cm	3.2 cm	14.8 W	17.5 W	1110 lm	900 lm	210 lm	New
502.781.00.1	aluminium anodised	60 cm	30 cm	70 cm	38.5 cm	3.2 cm	22.3 W	36 W	1710 lm	1380 lm	330 lm	New
502.782.00.1	aluminium anodised	75 cm	45 cm	70 cm	38.5 cm	3.2 cm	28 W	35 W	2160 lm	1740 lm	420 lm	New
502.783.00.1	aluminium anodised	90 cm	60 cm	70 cm	38.5 cm	3.2 cm	33.6 W	53.5 W	2610 lm	2100 lm	510 lm	New
502.784.00.1	aluminium anodised	105 cm	75 cm	70 cm	38.5 cm	3.2 cm	45 W	53.5 W	3420 lm	2760 lm	660 lm	New
502.785.00.1	aluminium anodised	120 cm	90 cm	70 cm	38.5 cm	3.2 cm	39.3 W	53.5 W	3000 lm	2400 lm	600 lm	New
502.786.00.1	aluminium anodised	135 cm	105 cm	70 cm	38.5 cm	3.2 cm	50.6 W	52.5 W	3900 lm	3120 lm	780 lm	New
502.787.00.1	aluminium anodised	160 cm	130 cm	70 cm	38.5 cm	3.2 cm	60.1 W	89.5 W	4650 lm	3720 lm	930 lm	New
502.780.14.1	black matt / aluminium anodised	40 cm	20 cm	70 cm	46.5 cm	3.2 cm	14.8 W	17.5 W	1110 lm	900 lm	210 lm	New
502.781.14.1	black matt / aluminium anodised	60 cm	30 cm	70 cm	38.5 cm	3.2 cm	22.3 W	36 W	1710 lm	1380 lm	330 lm	New

Art. no.	Colour / surface	B	B1	H	H1	T	Power consumption	Power consumption of mirror heating	Luminous flux (max. / above / below)	Luminous flux, above	Luminous flux, below	
502.782.14.1	black matt / aluminium anodised	75 cm	45 cm	70 cm	38.5 cm	3.2 cm	28 W	35 W	2160 lm	1740 lm	420 lm	New
502.783.14.1	black matt / aluminium anodised	90 cm	60 cm	70 cm	38.5 cm	3.2 cm	33.6 W	53.5 W	2610 lm	2100 lm	510 lm	New
502.784.14.1	black matt / aluminium anodised	105 cm	75 cm	70 cm	38.5 cm	3.2 cm	45 W	53.5 W	3420 lm	2760 lm	660 lm	New
502.785.14.1	black matt / aluminium anodised	120 cm	90 cm	70 cm	38.5 cm	3.2 cm	39.2 W	53.5 W	3000 lm	2400 lm	600 lm	New
502.786.14.1	black matt / aluminium anodised	135 cm	105 cm	70 cm	38.5 cm	3.2 cm	50.6 W	53.5 W	3900 lm	3120 lm	780 lm	New
502.787.14.1	black matt / aluminium anodised	160 cm	130 cm	70 cm	38.5 cm	3.2 cm	60.1 W	89.5 W	4650 lm	3720 lm	930 lm	New