


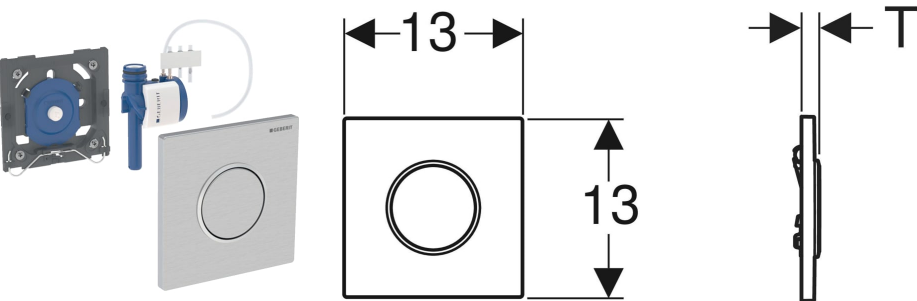

Example image

APPLICATION PURPOSES

- For manual flush actuation of urinals

CHARACTERISTICS

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set

- Tap group II in accordance with DIN 4109

TECHNICAL DATA

Flow pressure	1–8 bar
Test pressure, water max.	16 bar
Test pressure, air / inert gas max.	3 bar
Actuation force max.	12 N
Flow rate at 1 bar without flow limiter	0.3 l/s

Flow rate at 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 / 8 / 12 s
Button shape	round

SCOPE OF DELIVERY

- Type 10 actuator plate
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material	B cm	H cm	T cm
116.015.16.1	Plate, Button: black matt / Easy-to-clean coated Design ring/-s: black / Glossy	Stainless steel	13	13	1.1
116.015.DW.1	Plate, Button: black / Glossy Design ring/-s: black / Matt	Stainless steel	13	13	1.1

<i>Art. no.</i>	<i>Colour / surface</i>	<i>Product material</i>	<i>B</i> cm	<i>H</i> cm	<i>T</i> cm
116.015.JQ.1	Plate, Button: chrome / Matt, easy-to-clean coated Design ring/-s: chrome / Glossy	Plastic	13	13	1.3
116.015.KH.1	Plate, Button: chrome / Glossy Design ring/-s: chrome / Matt	Plastic	13	13	1.3
116.015.KJ.1	Plate, Button: white alpine / Glossy Design ring/-s: chrome / Glossy	Plastic	13	13	1.3
116.015.KK.1	Plate, Button: white alpine / Glossy Design ring/-s: gold-coloured / Glossy	Plastic	13	13	1.3
116.015.KM.1	Plate, Button: black / Glossy Design ring/-s: chrome / Glossy	Plastic	13	13	1.3
116.015.SN.1	Plate, Button: Brushed, easy-to-clean coated Design ring: Polished	Stainless steel	13	13	1.1