

Features:

- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0bar
- Thermostatic temperature control and automatic stop prevent surges of hot or cold water
- Performance Flow to provide a drenching experience
- Large 6" shower rose, premium handset and hose outlet included
- Easy installation with an adjustable faceplate that fits total wall depths from 50mm to 75mm for a perfect flush finish


Product Certifications:



Additional Information:

Specification	
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Recessed Dual Control
Shower Head Type:	Fixed Head & Single Function Handset
Shower Kit:	Rigid Riser with Fixed Head
Valve/Cartridge Type:	40mm Diverter Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

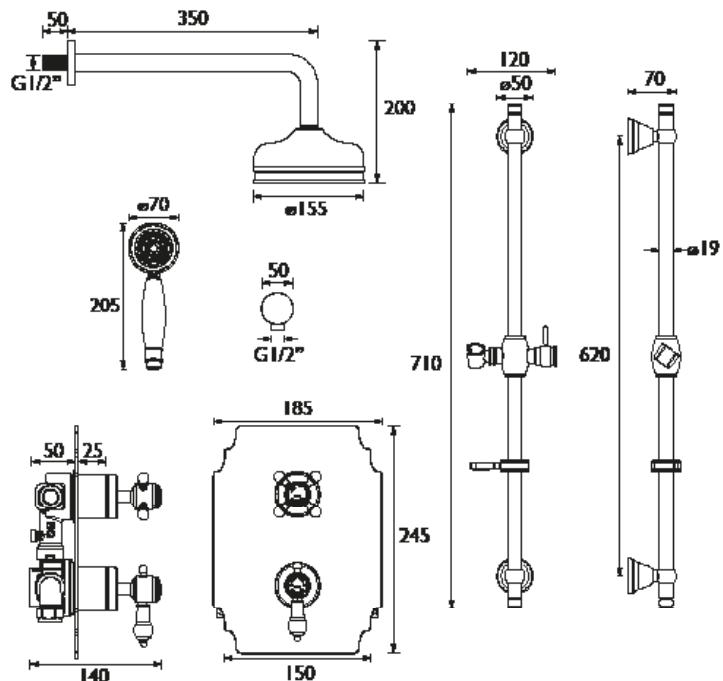

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	2	3.1	4.4	6.3	7.7	9.9
Through Fixed Head (mixed)	1.9	2.9	4.2	5.9	7.2	9.3

TECHNICAL DATA SHEET



HERITAGE®
BATHROOMS