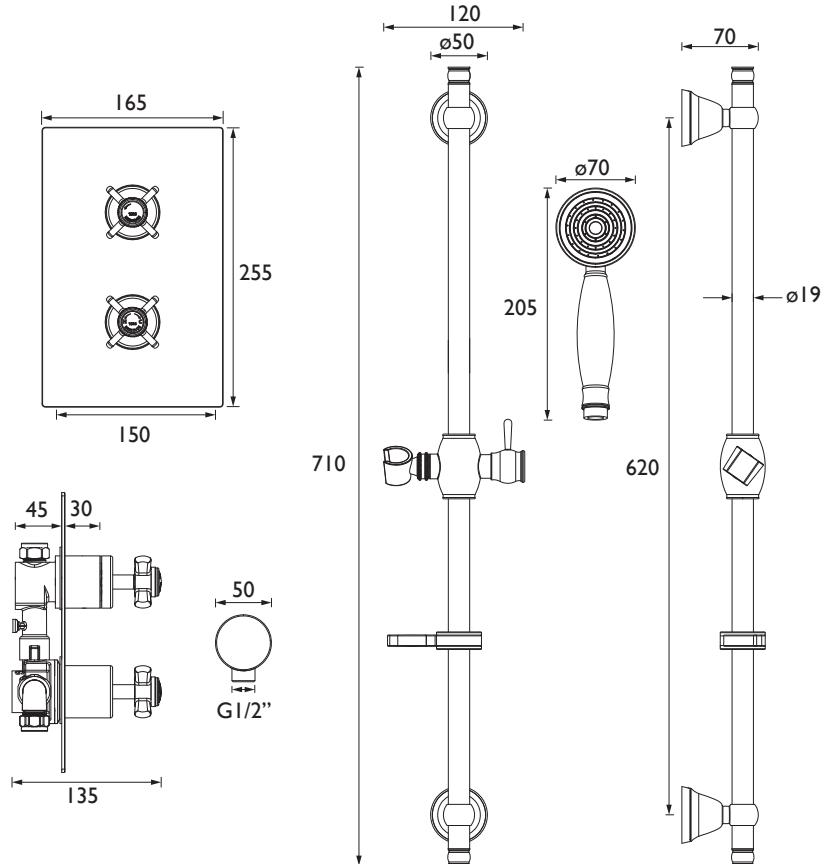


**Features:**

- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0 bar
- Thermostatic temperature control and automatic stop prevent surges of hot or cold water
- Performance Flow to provide a drenching experience
- Hose outlet included
- Ceramic disc - for smooth operation and added durability
- Easy installation with an adjustable faceplate that fits total wall depths from 45mm to 75mm for a perfect flush finish

**Product Certifications:****Additional Information:**

Specification	
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Recessed Thermostatic Shower
Shower Head Type:	Traditional Deluxe Handset
Handle Type:	Crosshead
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally Balanced
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression & G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

**Dimensions (measurements in mm)****Flow Rates (l/min)**

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	7.5	14.1	21	30.5	29	37.4

**TECHNICAL DATA SHEET**
**HERITAGE®**  
BATHROOMS

D4