
## TECHNICAL DATA SHEET

## ROXOR

Sales Code: URB803G Description: 600 F/S 2-Door/Drawer Unit & Basin 4



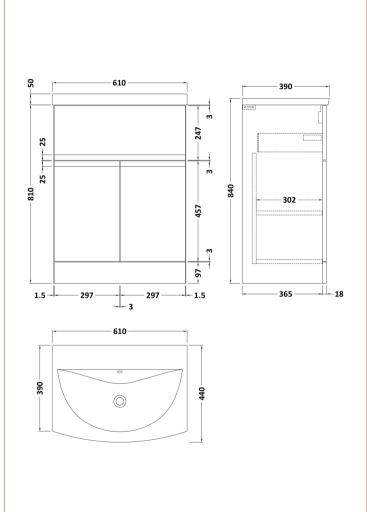


## **Packaging Details**

Barcode: 5056462674490

Sales Code: URB826 Description: 600 F/S 2-Door/Drawer Unit




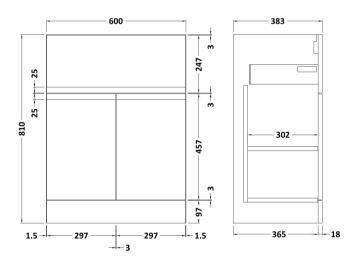

Duaduat Dimarri	
Product Dimensions	242
Height (mm):	810
Width (mm):	610
Depth (mm):	383
Nett Weight (kg):	26.5
Packaging Dimensions	
Height (mm):	780
Width (mm):	595
Depth (mm):	383
Gross Weight (kg):	27
Packaging Data	
Box Colour:	Brown Cardboard Box
Box Qty:	1
Label Size:	100 x 50
Label Colour:	White Label
Label Qty:	2
Outer Box Dimensions (If App	olicable)
Height (mm):	
Width (mm):	
Depth (mm):	
Gross Weight (kg):	
Barcode:	5056462659725
Product Details	
Country of Origin:	China
Fitting Instruction:	No
CE & UKCA:	N/A
FSC Certified Materials:	Yes
Colour:	Satin Green
Construction Method:	Cam & Wood Dowel
Construction Type:	Rigid
Cabinet Finish:	MFC Painted Matt
Fascia Finish:	Mdf Painted Matt
Cabinet Thickness (mm):	18
Fascia Thickness (mm):	18
Drawer Included:	Yes
Drawer Type:	80mm High Metal Softclose
No of Shelves:	1
Hinge Type:	95 Degree Clip-On Soft Close
Hinge Included:	Yes
Adjustable Legs:	No
Fixings Included:	Yes
Handle Style:	Not Applicable
Waste Shroud:	Yes
Handle Included:	No, Not Required
Handle Type:	Handless

Sales Code: NVM043 Description: 600 Curved Basin 1Th



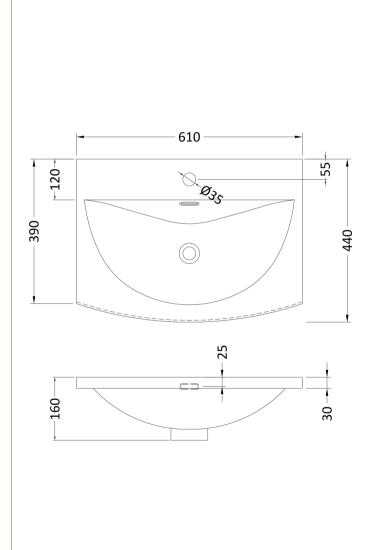

160	
610	
440	
11	
190	
630	
415	
11.5	
Brown Cardboard Box - Printed	
1	
100 x 50	
White Label	
2	
If Applicable)	
** /	
5056462620961	
China	
No	
No WRAS: N/A WRAS No: N/A	
Vitreous China	
No	
Not Applicable Includes Seat: Not Applicable	
Not Applicable Material: Not Applicable	
Not Applicable Hinge Type: Not Applicable	
Function: Not Applicable Hinge Type: Not Applicable Hinge Material: Not Applicable	
- Hot Applicable	
Type: Not Applicable Fittings: Not Applicable	
terns: Operating Type: Not Applicable Fittings: Not Applicable  Lever Type: Not Applicable	
One Taphole Chain Stay Hole: No	
Not Required Waste Type Req: Slotted	
nc: Yes Overflow Cover: Yes	
Depth (mm): 125mm	