
STRADA II

Floor standing single BTW bowl - AquaBlade®





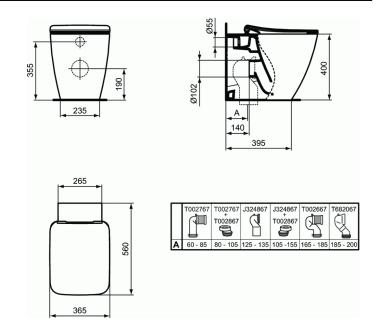

Floor standing single BTW bowl - AquaBlade®

Washdown

Back to wall

With fully hidden fixation

Horizontal outlet (universal)

Including fixation set TT0293851 (for fully hidden attachment - no lateral holes)

In carton box

FN 007

EN 997

Optional: Outlet bend 90° (in case of vertical installation) - please look at the drawing

Note: AquaBlade® WCs installation with pressure flush valve is not recommended!

Necessary equipment:

- Seat and cover THIN, short projection, metal hinges, duroplast (T360001)
- Seat and cover THIN, short projection, SOFT CLOSE with Easy Take Off hinges, duroplast (T360101)

Recommended equipment:

- Built-in cistern (control plate not included) (W370067)
- Dual flush control plate chrome (for W370067) (W3091AA)
- Outlet bend 90° (vertical) for 165-185 mm distance (from wall to drainage center) (T002667)
- Outlet bend 90° (vertical) for 60-85 mm distance (from wall to drainage center) (T002767)
- Outlet bend 90° (vertical) for 125-135 mm distance (from wall to drainage center) (J324867)
- Outlet bend 90° (vertical) for 185-200 mm distance (from wall to drainage center) (T682067)
- Eccentric adapter for combination with outlet bend 90° (vertical) J324867 for 105-155 mm distance (from wall to drainage center) or for combination with outlet bend 90°

FINISHES*

01

* 01 = Euro White

Ideal Standard - Vidima AD • 53 Marin Popov Str. • 5400 Sevlievo • Bulgaria • Tel: 00 359 675 30468

STRADA II Floor standing single BTW bowl -AquaBlade®



(vertical) T002767 - for 80-105 mm distance (from wall to drainage center) (T002867) - Holey restrictor (in case nominal full flush volume is more than 6 L up to 9L) (TT0298353)