



Concept Bath Filler 2 Hole Dual Control

Illustrated

B9929 Concept bath filler 2 hole dual control

Configuration options

Material

Chrome Plated Brass

Weights

B9929 2.64KG

Colours

Chromium plated (AA)

Flow rates


10.5 Litres per minute @ 3 bar pressure

Special Notes

Inlets screwed 3/4in BSP male, coned for 22mm copper. When installed in commercial applications A5901AA a 22mm thermostatic blending valve must be used. Unregulated flow rate 14.5 litres per minute at 0.1 bar.

Designer

Robin Levien, RDI

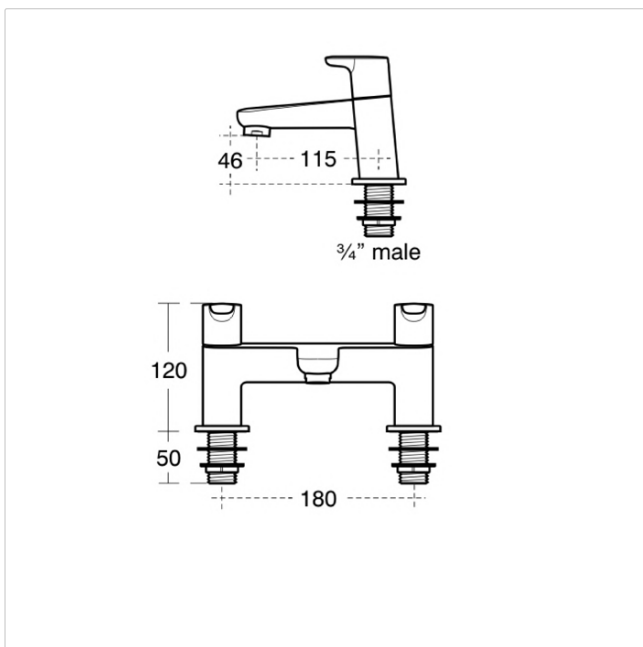

Frequently used applications

Hotels

Residential

Social Housing



Email: info@idealspec.co.uk
Tel: 0870 122 8822
Fax: 0870 122 8282
Web: www.idealspec.co.uk

Ideal Standard (UK) Ltd. makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.



Date created: 05/09/2016