

## Tempo Arc Idealform Double-Ended Bath 170cm x 75cm No Handgrips No Tapholes

### ILLUSTRATED

|              |  |
|--------------|--|
| <b>E2566</b> | Tempo Arc 170cm x 75cm Idealform double-ended bath, no handgrips no tapholes |
| <b>B0730</b> | Tempo 2 hole bath filler   |
| <b>E4130</b> | Uniline 170cm front panel  |
| <b>E4190</b> | Uniline 75cm end panel   |
| <b>E1486</b> | Luxury bath pop-up waste and overflow  |
| <b>A5901</b> | TMV thermostatic mixing valve, 22mm  |

### ILLUSTRATED PRODUCT DETAILS







#### Weights

|              |          |
|--------------|----------|
| <b>E2566</b> | 23.00 KG |
| <b>B0730</b> | 2.64 KG  |
| <b>E4130</b> | 3.60 KG  |
| <b>E4190</b> | 3.30 KG  |
| <b>A5901</b> | 1.70 KG  |

#### Materials

|              |                     |
|--------------|---------------------|
| <b>E2566</b> | Idealform           |
| <b>B0730</b> | Chrome Plated       |
| <b>E4130</b> | Acrylic             |
| <b>E4190</b> | Acrylic             |
| <b>E1486</b> | Mixed Material      |
| <b>A5901</b> | Chrome Plated Metal |

#### Finishes

|              |   |
|--------------|---|
| <b>E2566</b> |  White (01)    |
| <b>B0730</b> |  Chrome (AA)   |
| <b>E4130</b> |  White (01)    |
| <b>E4190</b> |  White (01)    |
| <b>E1486</b> |  Chrome (AA)  |
| <b>A5901</b> |  Chrome (AA) |

#### Capacity

|              |                            |
|--------------|----------------------------|
| <b>E2566</b> | 180.0 litres (to overflow) |
|--------------|----------------------------|

#### Flow rates

|              |                                       |
|--------------|---------------------------------------|
| <b>B0730</b> | 50 Litres per minute @ 3 bar pressure |
|--------------|---------------------------------------|

#### Designer


Robin Levien, RDI

#### Standards

Constructed to EN 198:2008. EN 14516

#### Special Notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, see A5901AA or Part G for guidance. One taphole fittings require offsetting from the overflow. Check positioning and compatibility before specifying.

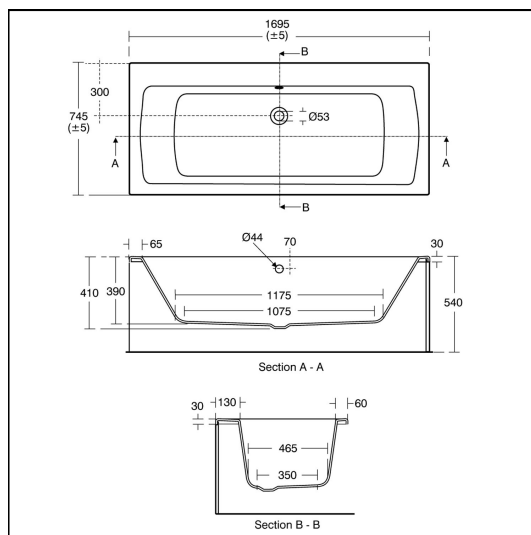

### ACCREDITATIONS

#### B0730(AA)

Unified Water Label  50.00 Litres Per Minute

#### E2566(01)

Unified Water Label  180.0 Litres