
Concept Bidet Mixer 1 Hole With Pop-up Waste



Special Notes

Suitable for balanced supplies. Inlets with flexible hoses and connections for 15mm copper tails. Fitted with a 5 lpm outlet flow regulator. When installed in commercial applications, A5900AA a 15mm thermostatic blending valve must be used. Unregulated flow rate 5.4 litres per minute at 0.2 bar.

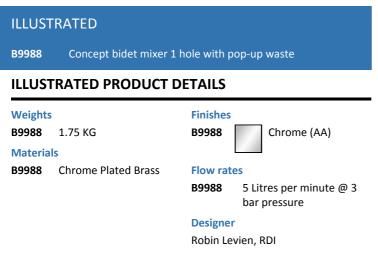