

shower valves - Mio Thermostatic Bath Shower Mixer

Introduction

Beautiful lines and contrasting chrome and black define the Mio range. Make a bold statement in the shower with this elegant bar shower mixer with its stylish range of accessories. Create the bathroom look you really want with the peace of mind that goes with thermostatic protection.

gives
total control

- Suitable for use with unvented supplies, combi boilers, gravity and mains pressure systems
- Thermal cartridge technology
- Temperature stability of $\pm 2^{\circ}\text{C}$
- Fail safe on hot and cold supplies
- Safe touch body
- Operating pressure range of 0.2 to 5 bar
- Integrated flow diverter
- Available with deck mounting legs

Product Range

Description	Finish	Code
mio thermostatic bath shower mixer wall mounted	Chrome	MI30014CP
mio thermostatic bath shower mixer with deck mounting legs	Chrome	MI30024CP
mio flexible riser rail kit	Chrome	31671CP



mio thermostatic bath shower mixer with flexible slide rail kit
MI30014CP



mio thermostatic bath shower mixer with flexible slide rail kit and deck mounting legs
MI30024CP




shower valves - Mio Thermostatic Bath Shower Mixer

Features

Technical Specification

Max Inlet Pressure static	5 Bar
Min Inlet Pressure dynamic	0.2 Bar
Max Inlet Temperature	85°C
Factory Pre-set Temperature	38°C with max temp stop
Inlet Connections	G ¾" F BSP (valve body)
Outlet Connections	G ½" F BSP
Min Temperature to achieve hot or cold failsafe	15°C
System Installation	Unvented, Pressurised, Gravity and Combination Boilers

Performance

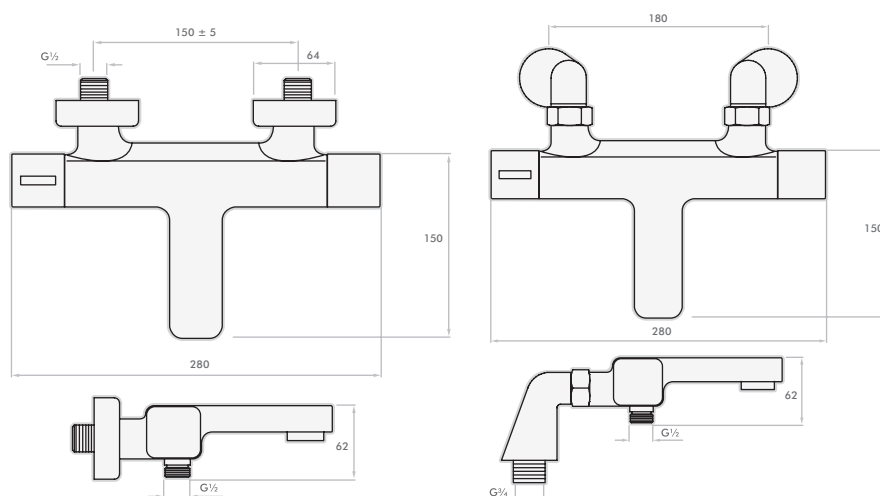

INSPIRING CONFIDENCE

inta