



Product

400MS15CP - 15mm Intamix Thermostatic Mixing Valve with Isolation Valves with Top Outlet Connection

Technical Specification

Max Inlet Pressure (static):	10 Bar
Min Inlet Pressure (dynamic):	0.2 Bar
Max Inlet Temperature:	85°C
Temperature Adjustment Range:	30°C to 50°C
Temperature Stability:	+/-2°C
Max Pressure Differential:	5:1
Min Temperature Differential Between Hot Inlet & Mixed Outlet to Achieve Cold Water Failsafe:	10°C



Additional Information

One valve to suit all applications


One piece cartridge for ease of maintenance and replacement

High flow rates with low pressure drops

Complies with building regulations Part G

Integral check valves & strainers

Supplied with 2x EPDM Rubber sealing washers to ensure a water tight seal.

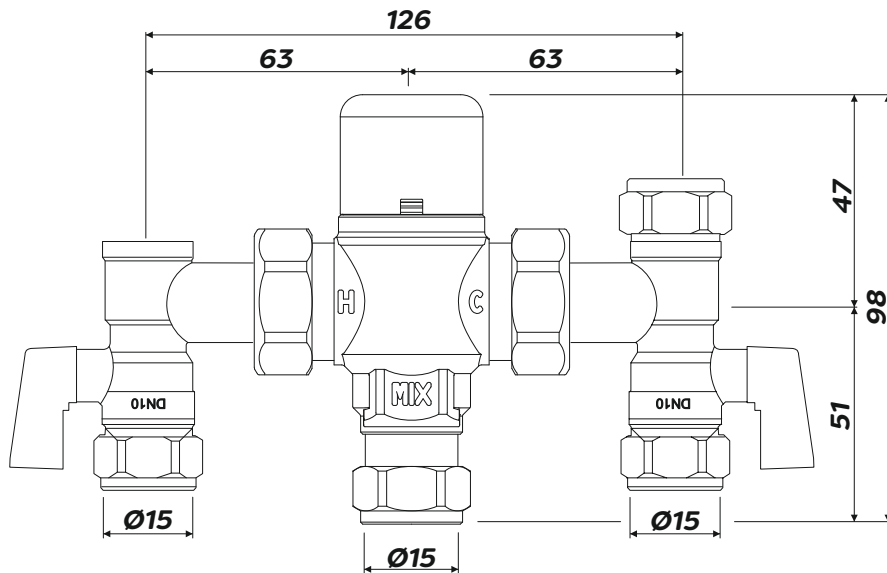

For More Information
Please Scan

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF
T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk
www.intatec.co.uk

03/23
E&OE