inta



Additional Information

Anti-scald thermostatic technology with fail safe protection on both the hot and cold supplies

Safe touch body in a minimalistic style

Pivoting slide rail kit

Large bore smooth anti-twist hose

Multi-function push button handset


Fast fix brackets as standard

<u>Product</u>

CB10035CP - Deluxe Nulo Safe Touch Thermostatic Single Outlet Bar Shower with Flexible Slide Rail Kit, Smooth Hose & Push Button Handset

Technical Specification

Max Inlet Pressure (static):	5 Bar
Min Inlet Pressure (dynamic):	0.2 Bar
Max Inlet Temperature:	60°C
Factory Pre-set Temperature:	38°C with max temp stop
Temperature Stability:	+/-2°C
Inlet Connections with fast fix:	15mm
Outlet Connection:	G1/2" BSP
Min temperature differential between hot inlet and mixed outlet to achieve cold water	1500
failsafe:	15°C

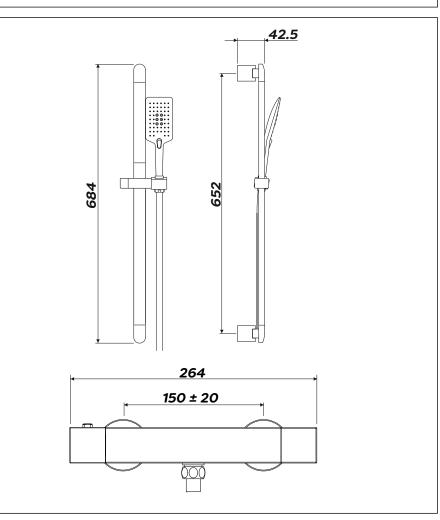

Flow Rates (Open Outlet)									
Pressure (Bar)	0.25	0.5	0.75	1.0	1.5	2.0	2.5	3.0	
Bottom Outlet (L/m)	5.5	7	10	12	15	17.5	19	21	

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 OPF T. 01889 272180 F. 01889 272181 E. <u>sales@intatec.co.uk</u> www.intatec.co.uk