



Product

MM10035CP - Deluxe Mio Safe Touch Thermostatic Single Outlet Bar Shower with Flexible Slide Rail Kit, Bush Button Handset and Smooth Hose

Technical Specification

Max Inlet Pressure (static):	5 Bar
Min Inlet Pressure (dynamic):	0.2 Bar
Max Inlet Temperature:	60°C
Factory Pre-set Temperature:	38°C with max temp stop
Temperature Stability:	+/-2°C
Inlet Connections with fast fix:	15mm
Outlet Connection:	G1/2" BSP
Min temperature differential between hot inlet and mixed outlet to achieve cold water failsafe:	10°C



Additional Information


Anti-scald thermostatic technology with fail safe protection on both the hot and cold supplies

Adjustable fixing points for riser

Large bore anti-twist hose

Safe touch body with stylish metal handles

Push button multi-function handset

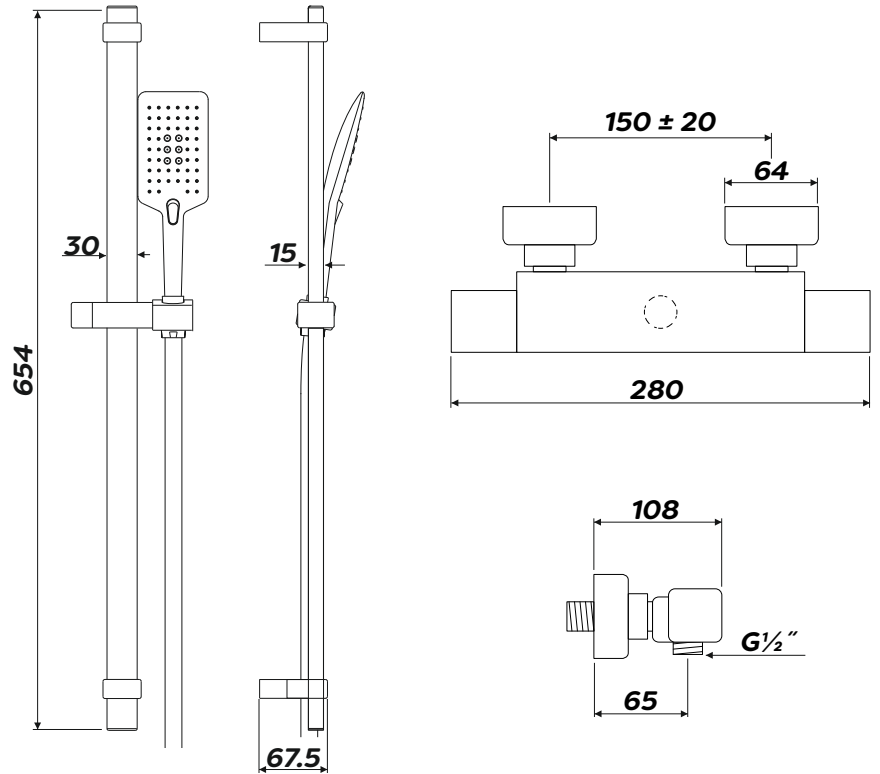

Flow Rates (Open Outlet)

Pressure (Bar)	0.25	0.5	0.75	1.0	1.5	2.0	2.5	3.0	3.5	4.0
Bottom Outlet (L/m)	3	5	6.5	7.8	9.5	11	12.5	14	15.5	16.4