




## Product

**CB10031CP - Nulo Safe Touch Thermostatic Single Outlet Bar Shower with Flexible Slide Rail Kit**

## Technical Specification

<b>Max Inlet Pressure (static):</b>	<b>5 Bar</b>
<b>Min Inlet Pressure (dynamic):</b>	<b>0.2 Bar</b>
<b>Max Inlet Temperature:</b>	<b>60°C</b>
<b>Factory Pre-set Temperature:</b>	<b>38°C with max temp stop</b>
<b>Temperature Stability:</b>	<b>+/-2°C</b>
<b>Inlet Connections with fast fix:</b>	<b>15mm</b>
<b>Outlet Connection:</b>	<b>G1/2" BSP</b>
<b>Min temperature differential between hot inlet and mixed outlet to achieve cold water failsafe:</b>	<b>15°C</b>

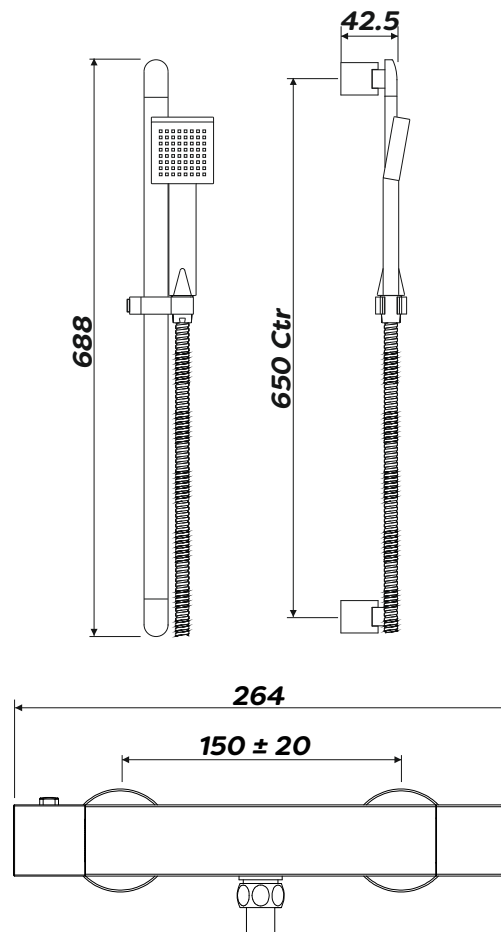

## Additional Information

**Anti-scald thermostatic technology with fail safe protection on both the hot and cold supplies**

**Safe touch body in a minimalistic style**

**Pivoting slide rail kit**

**Large bore anti-twist hose**

**Fast fix brackets as standard**

**Deluxe option available**

## Flow Rates (Open Outlet)

Pressure (Bar)	0.25	0.5	0.75	1.0	1.5	2.0	2.5	3.0
Bottom Outlet (L/m)	5.5	7	10	12	15	17.5	19	21