
PURO SET WIDE RIGHT

- unique bathtub sensibly accommodates different needs and desires in a single solution
- built-in bathtub is ideal for both bathing and showering
- clean, minimalist rectangular bathtub with reduced edges
- the centrally located waste and overflow fitting keeps the sense of balance through symmetry
- perfect match for the PURO model range
- backrest on one side provides plenty of space for sitting or relaxed bathing
- steep sides ensure a generously dimensioned interior without awkward barrier thanks to the centrally positioned waste
- the reduced depth makes it easier to get in and out of the tub and saves on water consumption.
- made of KALDEWEI steel enamel
- optional anti-slip finish offers maximum safety when showering



Similar illustration



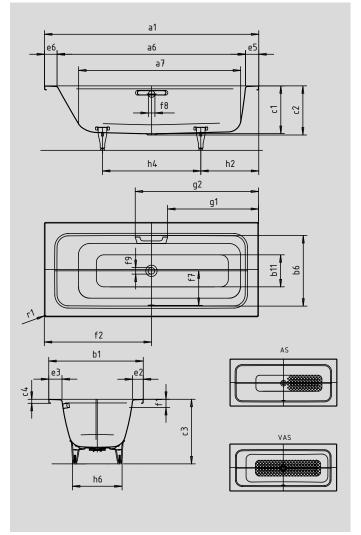

External length a1 1700 mm Internal length (top) a6 1495 mm Internal length (bottom) a7 1300 mm External width b1 750 mm Internal width (top) b6 560 mm			
internal length (topt) a ₆ 1495 mm linternal length (tottom) a ₇ 1300 mm kternal width (top) b ₆ 550 mm internal width (bottom) b ₁ 435 mm internal width (bottom) c ₁ 380 mm begin including waste outlet c ₂ 390 mm belight with feet c ₂ 390 mm belight with feet c ₃ 350 mm belight of rim c ₄ 32 mm Width of rim (lengthwise) c ₂ 350 mm Width of rim (lengthwise) c ₃ 350 mm Width of rim (lengthwise) c ₄ 350 mm Width of rim (lengthwise) c ₃ 350 mm Distance bard edge to centre of overflow hole c ₄ 350 mm Distance bath edge to centre of diverlin (lengthwise) c ₄ 350 mm Distance bath edge (loot end) to where girjy/hander end	Model No.		667
Internal length (bottom) a7 1300 mm External width (1000) b3 750 mm Internal width (1000) b6 560 mm Internal width (1000) b1 380 mm Internal width (1000) c2 380 mm Depth including waste outlet c3 350 mm Height of rim c4 320 mm Height of rim (1000 cm) c4 320 mm Width of rim (1000 cm) c3 350 mm Width of rim (1000 cm) c9 350 mm Distance but ever of overflow hole c9 350 mm Distance but weet of overflow hole c9 350 mm Distance but weet of overflow hole c9 350 mm Distance but weet of view hole c9 350 mm Distance but weet of view hole c9 350 mm Distance but weet	External length	a_1	1700 mm
External width (top) b, 750 mm Internal width (top) b, 550 mm Internal width (botton) b, 350 mm Internal depth c, 330 mm Depth including waste outlet c, 390 mm Height of rim c, 320 mm Height of rim c, 320 mm Width of rim (loct end) e, 30 mm Width of rim (lengthwise) e, 30 mm Uistance bedy de centre of overflow hole f, 30 mm Distance bedy de centre of overflow hole f, 30 mm Distance between centre holes f, 30 mm Distance between centre holes f, 30 mm Distance bedy (foot end) to where grip/handle starts g, 30 mm Distance between the feet (so tend) to where grip/handle ends g, 30 mm Distance between the feet (so tend) to where grip/handle ends	Internal length (top)	a_6	1495 mm
internal width (topt) b ₀ 560 mm internal width (bottom) b ₁ 635 mm internal depth c ₁ 380 mm beth including waste outlet c ₂ 390 mm Height with feet c ₃ 520-553 mm Height of rim c ₄ 32 mm Width of rim (foot end) c ₂ 35 mm Width of rim (lengthwise) c ₂ 35 mm Width of rim (lengthwise) c ₂ 30 mm Width of rim (lengthwise) c ₂ 30 mm Width of rim (lengthwise) c ₃ 30 mm Distance bed ocentre of overflow hole c ₄ 30 mm Distance bed dege (to entre of overflow hole c ₅ 30 mm Distance bed weet ocentre of overflow hole c ₆ 30 mm	Internal length (bottom)	a ₇	1300 mm
Internal width (bottom) b ₁₁ 435 mm Internal width (bottom) b ₁₁ 330 mm Depth including waste outlet c ₂ 390 mm Height with feet c ₃ 520-553 mm Height of rim c ₄ 32 mm Width of rim (floot end) e ₁ 105 mm Width of rim (lengthwise) e ₂ 85 mm Width of rim (lengthwise) e ₃ 105 mm Distance to pedge to centre of overflow hole f ₁ 70 mm Distance between centre holes f ₂ 270 mm Distance between centre holes f ₂ 270 mm Distance between the dege (foot end) to where grip/ handle ends g ₂ 378 mm Distance between the feet h ₄ 374 mm Max. width of feet <t< td=""><td>External width</td><td>b_1</td><td>750 mm</td></t<>	External width	b_1	750 mm
Internal depth c₁ 380 mm Depth including waste outlet c₂ 390 mm Height of thin c₄ 520-553 mm Height of finin (foot end) e₁ 3105 mm Width of rim (foot end) e₂ 85 mm Width of rim (lengthwise) e₂ 105 mm Width of rim (lengthwise) e₃ 105 mm Wistance bath edge to centre of overflow hole f₃ 70 mm Distance bath edge to centre of drain hole f₃ 52 mm Distance bath edge (foot end) to where girp/handle ends g₃ 378 mm Distance bath edge (foot end) to where girp/handle ends g₃ 398 mm Distance bath edge (foot end) to where girp/handle ends g₃ 393 mm Width	Internal width (top)	b ₆	560 mm
Depth including waste outlet c₂ 390 mm Height with feet c₃ 520-553 mm Height with feet c₃ 32 mm Width of rim (lengthwise) e₃ 185 mm Width of rim (lengthwise) e₃ 105 mm Width of rim (lengthwise) e₃ 105 mm Width of rim (lengthwise) e₃ 100 mm Distance bethe dege to centre of overflow hole f₃ 20 mm Distance between centre holes f₃ 52 mm Distance beth edge (foot end) to where grip/handle starts g₃ 32 mm Distance beth edge (foot end) to where grip/handle starts g₃ 33 mm Distance between the feet <t< td=""><td>Internal width (bottom)</td><td>b₁₁</td><td>435 mm</td></t<>	Internal width (bottom)	b ₁₁	435 mm
Height with feet c c c c c c c c c c c c c c c c c c	Internal depth	C_1	380 mm
Height of rim 64 32 mm Width of rim (foot end) e1 105 mm Width of rim (lengthwise) e2 85 mm Width of rim (lengthwise) e3 105 mm Width of rim (lengthwise) e3 107 mm Width of rim (head end) e6 100 mm Distance both edge to centre of overflow hole f1 70 mm Distance bath edge to centre of drain hole f2 850 mm Distance between centre holes f3 270 mm Distance both edge (foot end) to where grip/handle starts f3 52 mm Distance bath edge (foot end) to where grip/handle ends g2 978 mm Distance bath edge (foot end) to where grip/handle ends g2 398 mm Distance between the feet h3 393 mm Distance between the feet h4 393 mm Max. width of feet h6 393 mm Radius f6 393 mm Weter volume** in litres f7 393 mm Weter volume** in litres f8 393 mm Weight of the enamelled bath	Depth including waste outlet	\mathbf{c}_2	390 mm
Width of rim (foot end) e1 105 mm Width of rim (lengthwise) e2 85 mm Width of rim (lengthwise) e3 105 mm Width of rim (lengthwise) e6 100 mm Width of rim (lengthwise) e6 100 mm Distance top edge to centre of overflow hole f1 70 mm Distance bath edge to centre of drain hole f2 270 mm Distance between centre holes f6 527 mm Distance for overflow hole f6 52 mm Distance between centre holes f6 52 mm Distance between centre holes f6 52 mm Distance between centre holes f6 52 mm Distance between centre of touth owhere grip/handle estarts g1 72 mm Distance between the dege (foot end) to where grip/handle ends g2 398 mm Distance between the feet f6 393 mm Max. width of feet f6 393 mm Radius f6 393 mm Radius f6 393 mm Weight of the enamelled bath in kg	Height with feet	C ₃	520-553 mm
Width of rim (lengthwise) e2 85 mm Width of rim (lengthwise) e3 105 mm Width of rim (lengthwise) e6 100 mm Width of rim (lengthwise) e6 100 mm Width of rim (lengthwise) e6 100 mm Distance top edge to centre of overflow hole f1 70 mm Distance bath edge to centre of drain hole f2 850 mm Distance between centre holes f2 270 mm Distance both edge (foot end) to where grip/handle starts g1 52 mm Distance bath edge (foot end) to where grip/handle ends g2 978 mm Distance both edge (foot end) to where grip/handle ends g2 978 mm Distance both edge to centre of foot h2 393 mm Distance both edge (foot end) to where grip/handle ends g2 393 mm Distance both edge (foot end) to where grip/handle ends g2 393 mm Distance both edge (foot end) to where grip/handle ends g2 393 mm Distance both edge (foot end) to where grip/handle ends g2 393 mm Max. width of feet h6 393 mm	Height of rim	C ₄	32 mm
Width of rim (lengthwise) e₃ 105 mm Width of rim (head end) e₃ 100 mm Distance top edge to centre of overflow hole f₁ 70 mm Distance bath edge to centre of drain hole f₂ 850 mm Distance between centre holes f₂ 270 mm Diameter of overflow hole f₃ 52 mm Distance bath edge (foot end) to where grip/handle starts g₁ 52 mm Distance bath edge (foot end) to where grip/handle ends g₂ 978 mm Distance both edge (foot end) to where grip/handle ends g₂ 978 mm Distance between the feet h₂ 393 mm Max. width of feet h₃ 393 mm Radius r₁ 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Antslip 50 x x 252 mm	Width of rim (foot end)	$\mathbf{e}_{\scriptscriptstyle 1}$	105 mm
Width of rim (head end) e ₆ 100 mm Distance top edge to centre of overflow hole f ₁ 70 mm Distance bath edge to centre of drain hole f ₂ 850 mm Distance between centre holes f ₇ 270 mm Diameter of overflow hole f ₈ 52 mm Diameter of drain hole f ₉ 52 mm Distance bath edge (foot end) to where grip/handle starts g ₄ 722 mm Distance bath edge (foot end) to where grip/handle ends g ₂ 978 mm Distance foot end of bath edge to centre of foot h ₂ 398 mm Distance between the feet h ₄ 754 mm Max. width of feet h ₆ 393 mm Radius r ₁ 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540x252 mm	Width of rim (lengthwise)	e_2	85 mm
Distance top edge to centre of overflow hole f₁ 70 mm Distance bath edge to centre of drain hole f₂ 850 mm Distance between centre holes f₂ 270 mm Diameter of overflow hole f₂ 52 mm Diameter of drain hole f₂ 52 mm Distance bath edge (foot end) to where grip/handle starts g₂ 978 mm Distance bath edge (foot end) to where grip/handle ends g₂ 978 mm Distance both edge (foot end) to where grip/handle ends g₂ 398 mm Distance between the feet h₄ 754 mm Max. width of feet h₆ 393 mm Radius f₁ 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Width of rim (lengthwise)	e_3	105 mm
Distance bath edge to centre of drain hole f₂ 850 mm Distance between centre holes f₂ 270 mm Diameter of overflow hole f₂ 52 mm Diameter of drain hole f₂ 52 mm Distance bath edge (foot end) to where grip/handle starts g₁ 722 mm Distance bath edge (foot end) to where grip/handle ends g₂ 978 mm Distance foot end of bath edge to centre of foot h₂ 398 mm Distance between the feet h₄ 754 mm Max. width of feet h₆ 393 mm Radius r₁ 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Width of rim (head end)	e ₆	100 mm
Distance between centre holes f₁ 270 mm Diameter of overflow hole f₂ 52 mm Diameter of drain hole f₂ 52 mm Distance bath edge (foot end) to where grip/handle starts g₂ 978 mm Distance bath edge (foot end) to where grip/handle ends g₂ 398 mm Distance foot end of bath edge to centre of foot h₂ 398 mm Distance between the feet h₄ 754 mm Max. width of feet h₂ 393 mm Radius r₁ 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Distance top edge to centre of overflow hole	f_1	70 mm
Diameter of overflow hole f ₈ 52 mm Diameter of drain hole f ₉ 52 mm Distance bath edge (foot end) to where grip/handle starts g ₁ 722 mm Distance bath edge (foot end) to where grip/handle ends g ₂ 978 mm Distance foot end of bath edge to centre of foot h ₂ 398 mm Distance between the feet h ₄ 754 mm Max. width of feet h ₆ 393 mm Radius r ₁ 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Distance bath edge to centre of drain hole	f_2	850 mm
Diameter of drain hole f₂ 52 mm Distance bath edge (foot end) to where grip/handle starts g₂ 978 mm Distance bath edge (foot end) to where grip/handle ends g₂ 398 mm Distance foot end of bath edge to centre of foot h₂ 398 mm Distance between the feet h₄ 754 mm Max. width of feet h₆ 393 mm Radius r₁ 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Distance between centre holes	f_7	270 mm
Distance bath edge (foot end) to where grip/handle starts g1 722 mm Distance bath edge (foot end) to where grip/handle ends g2 978 mm Distance foot end of bath edge to centre of foot h2 398 mm Distance between the feet h4 754 mm Max. width of feet h6 393 mm Radius r1 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Diameter of overflow hole	f ₈	52 mm
Distance bath edge (foot end) to where grip/handle ends g2 978 mm Distance foot end of bath edge to centre of foot h2 398 mm Distance between the feet h4 754 mm Max. width of feet h6 393 mm Radius r1 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Diameter of drain hole	f_9	52 mm
Distance foot end of bath edge to centre of foot h_2 398 mm Distance between the feet h_4 754 mm Max. width of feet h_6 393 mm Radius r_1 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Distance bath edge (foot end) to where grip/handle starts	g_1	722 mm
Distance between the feet h_4 754 mm Max. width of feet h_6 393 mm Radius r_1 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Distance bath edge (foot end) to where grip/handle ends	g_2	978 mm
Max. width of feet h_6 393 mm Radius r_1 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Distance foot end of bath edge to centre of foot	h ₂	398 mm
Radius r1 12 mm Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Distance between the feet	h_4	754 mm
Water volume** in litres 93 Weight of the enamelled bath in kg 50 Anti-slip 540 x 252 mm	Max. width of feet	h ₆	393 mm
Weight of the enamelled bath in kg50Anti-slip540 x 252 mm	Radius	r ₁	12 mm
Anti-slip 540 x 252 mm	Water volume** in litres		93
·	Weight of the enamelled bath in kg		50
Full anti-slip 1020 x 252 mm	Anti-slip		540 x 252 mm
	Full anti-slip		1020 x 252 mm

