


CONO WALL-HUNG WASHBASIN

- washbasin with premium character exudes elegance and harmony
- optimally integrated enamelled waste accentuates the underlying geometry of the washbasin
- unusually generous rim provides space for fittings or individual accessories
- perfectly complements the CONO range



Similar illustrations

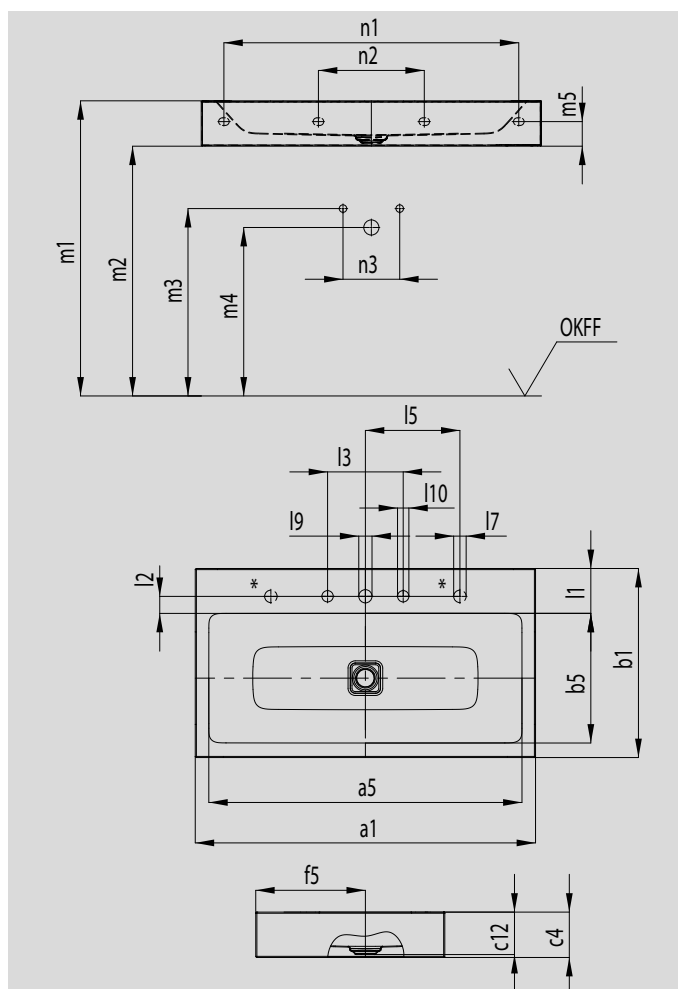

* Control knob holes for CLOU waste and overflow system with cable operated pop-up waste and deck mounted control knob

		NEW			
Model No.		3079	3089	3090	3091
External length	a1	500	600	900	1200 mm
Internal length	a5	431,5	532	832	1128 mm
External width	b1	500	500	500	500 mm
Internal width	b5	347,5	348	348	343 mm
Height of rim	c4	120	120	120	120 mm
Distance basin surface to bottom edge of waste hole	c12	112	112	112	112 mm
Distance outer edge to centre of waste hole	f5	290	290	290	290 mm
Depth of tap deck	l1	116	116	116	116 mm
Distance tap holes to edge	l2	45	45	45	45 mm
Distance of tap holes	l3	200	200	200	200 mm
Distance of tap hole to centre of control knob hole	l5	200	250	275	- mm
Diameter of control knob hole	l7	33	33	33	33 mm
Diameter of centre tap hole	l9	35	35	35	35 mm
Diameter of outside tap holes (3 tap holes only)	l10	30	30	30	30 mm
Distance FF*1 to top edge of basin surface	m1	820-850	820-850	820-850	820-850 mm
Distance FF*1 to bottom edge (washbasin)	m2	700-730	700-730	700-730	700-730 mm
Distance FF*1 to centre of water inlet	m3	570-600	570-600	570-600	570-600 mm
Distance FF*1 to centre of drain hole wall connection	m4	520-580	520-580	520-580	520-580 mm
Distance bottom edge to centre of fixing hole	m5	65	65	65	65 mm
Outer distance of fixing holes	n1	-	-	780	1040 mm
Inner distance of fixing holes	n2	280	280	280	280 mm
Distance hot/cold water inlet	n3	80-150	80-150	80-150	80-150 mm
Weight of the enamelled washbasin in kg		11,49	15	19,7	24,8

*1 Finished floor level.
Subject to technical alterations, tolerances and errors. Similar illustrations.

KALDEWEI