

Product finish	Chrome
Product category	Pillar
First supplied date	Mid 2012

EAN 13 barcode	5015834041407
Location of DOM trace code:	DOM code on multiple box outer



Nb. Model shown may not be displayed in the finish as described.


#### Product features:

- Metal construction throughout (plastic hot / cold markers)
- Custom designed for lower to mid pressures
- Quarter turn handle action for precise flow control
- Supplied with fixed 1/2" inlets
- Brass back fixing nuts

#### Additional information / Parts included:

ABS indicies caps

#### Product dimensions & valve type:

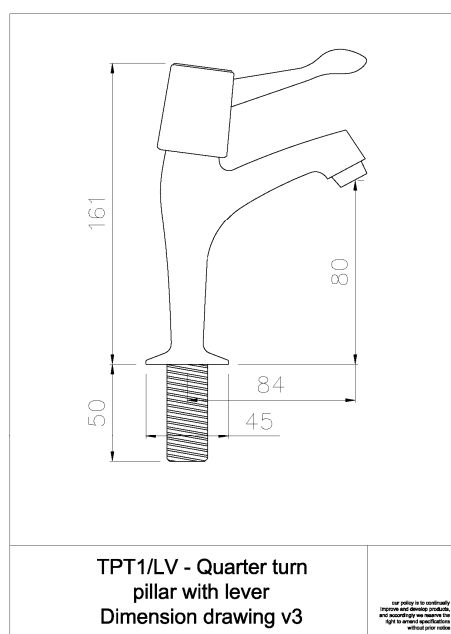


- Overall Height / projection: 161 mm
- Exit reach: 84 mm
- Exit height: 80 mm
- Centre distance(s): N/A mm

- Base diameter(s): 45 mm
- Recommended fixing hole diameter: Ø 32-35 mm
- Max. surface fixing depth: 25 mm

- Control valve type: 1/2" Quarter turn ceramic disc
- Valve detail:

- DDA compliant design? Yes

#### Product flow characteristics:

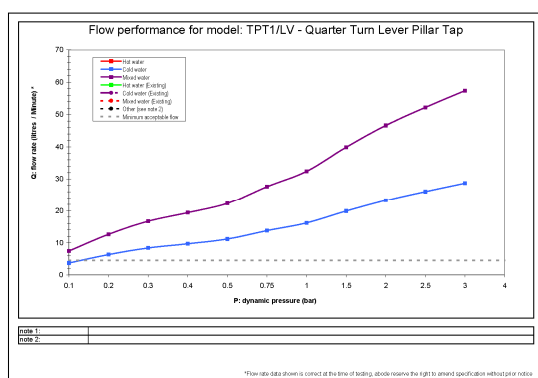

- Min / Max water pressure: 0.10 / 5.50 bar (LP)

- Recommended / Maximum water temperature: 46°C / 70°C

- Part G:  
Unrestricted mixed flow rate, 3 bar (litres / min): n/a

\*Flow results are produced under test conditions and represent the non flow regulated dynamic output of the product model.

LP (lower pressure) less than 0.5 bar  
MP (medium pressure) 0.5 bar to 1 bar  
HP1 (high pressure) 1 bar to 2 bar  
HP2 (very high pressure) 2 bar or more

Minimum flow rate (1 GPM) based on mixed flow.

Flow regulator included? N/A

**Inlet pipes:**

- **Tail pipe inlet / outlet size:** N/A / 1/2" BSPP male (15mm ID) to BS2779
- **Inlet pipe type / length:** Fixed threaded inlets / 50 mm

**Spout detail & Flow characteristics:**

- |  |  |
|--|--|
| <ul style="list-style-type: none"><li>• <b>Spout diameter:</b> N/A mm</li><li>• <b>Spout aerator size:</b> Pushfit</li><li>• <b>Spout rotation range:</b> 0°</li><li>• <b>Aerator type:</b> Flow straightener</li><li>• <b>Aerator colouring:</b> Black plastic</li><li>• <b>Spout connection:</b> N/A</li></ul> | <ul style="list-style-type: none"><li>• <b>Product flow characteristics:</b> Single flow</li><li>• <b>Non return valve (NRV) supplied:</b> No, none required</li><li>• <b>NRV required to be installed for byelaw compliance:</b> None</li></ul> |
|--|--|

**Product markings and indicators:**

- **Branding position:** None
- **Hot / Cold indication:** Red & Blue Plastic Discs

**Packaged properties:**

<b>Box length:</b> 240 mm	<b>Box depth:</b> 55 mm
<b>Box width:</b> 150 mm	<b>Units per outer:</b> 18
<b>Box has 'pressure warning sticker' ?</b>	No
<b>Packaging branding:</b>	Brown unprinted

**Tap only weight:** 0.91 kg

**Boxed weight:** 1.02 kg

**Total card weight:** 157 grams

**Total plastics weight:** 27 grams

- **Approval certificate number:** tbc
- **Expiry date:**

**Warranty Summary (Full details available on request):**

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 2 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 years

**Care instructions:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives