

AQUANOMIC AQUAPLAY SINGLE LEVER TAP CHROME

TAQPLAYSLCM/-AN



Targeting, the growing popularity, entry level contemporary styling. Available also as standard monobloc.

Bright chrome, satin bronze or matte black finish gives a contemporary look that flexes with a range of interior colour schemes. It is fitted with a Neoperl aerator that ensures a non-splash, creamy flow while the flexible tails are supplied to ease installation.

- Easy Fit Fixing Kit
- Flexi Tails for ease of installation with NRV
- Money saving Cold Start valve
- Side lever with modern single flow spout with integrated aerator
- WRAS approved

Overall Height (mm)	334
Spout Reach (mm)	181
Spout Height (mm)	235
Spout Rotation Range	
Handle Type	Single Lever
Colour	Chrome
Bar Pressure Suitability	Medium Pressure
Min. Bar Pressure	0.5
Max. Bar Pressure	5
Mixed Flow Rate at 3 Bar Pressure (l/min)	5.09
Flow Type	
Recommended Hot Water Temperature	46
Maximum Hot Water Temperature	70
Handle Control	Half Turn
Centre Distance (mm)	
Cartridge Type	Ceramic Disc Cartridge
Aerator Type	Honeycomb Aerator
Inlet Pipes	Stainless Flexible Hoses
Anti-Splash Spout	Yes
Pull Out Spray	No
WRAS Approved	Yes
Product Code	TAQPLAYSLCM/-AN
Barcode	5015834056180


AGA Rangemaster continuously seeks improvements in specification, design and production of products and thus, alterations take place periodically. Whilst every effort is made to produce up to date resources, the information included here is intended as a guide. Always refer to the installation instructions when fitting, installation work should be completed by a professional tradesman.

AQUANOMIC AQUAPLAY SINGLE LEVER TAP CHROME

TAQPLAYSLCM/-AN



Technical Drawing

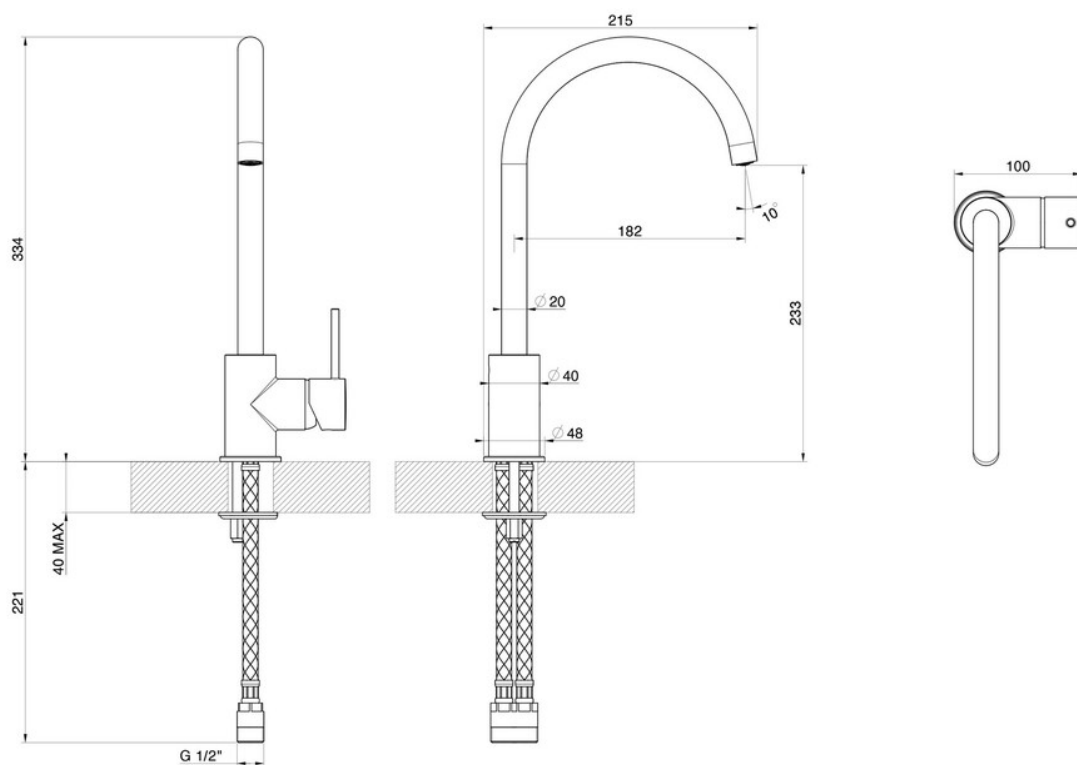

Date of download: July 26, 2025

AGA Rangemaster continuously seeks improvements in specification, design and production of products and thus, alterations take place periodically. Whilst every effort is made to produce up to date resources, the information included here is intended as a guide. Always refer to the installation instructions when fitting, installation work should be completed by a professional tradesman.