

MIRA ELEMENT SLT

Part Number: EV, Chrome: 1.1656.011
Part Number: BIV, Chrome: 1.1656.012
Part Number: BIR, Chrome: 1.1656.013

THE PERFECT FIT NO MATTER WHAT THE JOB

HIGH PERFORMANCE

Magni-Flo™ gives up to 3x more flow

TEMPERATURE CONTROL

Thermostatic temperature stability

EASY TO FIT

Quickly and easily fits onto reversed inlet supplies

EASY TO SERVICE

Large, long-life filters and replaceable cartridge

FOR YOUR CUSTOMER

Lift and twist – one lever control for flow and temperature

Approved to TMV2 – for the ultimate in comfortable showering

Uses up to 30% less water with the eco flow function (overrideable)

5 spray 11 cm showerhead with rub clean nozzles (except BIR which has one single spray)



MIRA ELEMENT SLT EV

MIRA ELEMENT SLT BIR

MIRA ELEMENT SLT BIV



WRAS



TECH DETAILS

TEMPERATURE CONTROL

Control type: Thermostatic

INSTALLATION

Water entry points: Rising, falling or rear

Inlet connections: 15 mm compression (EV, BIV & BIR)

Outlet connections: ½" BSP Flat Face (EV) or 15 mm compression (BIV & BIR)

Reversed inlets supported: Yes

SUPPLY CONDITIONS (hot and cold supplies to be at nominally equal pressure)

Cold water range: Up to 25°C

Hot water range: 50°C-85°C (operating); 55°C-65°C (recommended)

Minimum maintained pressure: 0.1 bar (1 metre head)

Maximum maintained pressure: 5.0 bar (50 metre head)

Maximum static pressure: 10.0 bar (100 metre head)

PERFORMANCE

Flow rate (at handset): 13 l/min at 0.5 bar

Temperature stability: ± 2°C

SAFETY FEATURES

Automatic shutdown: Shutdown to seepage in 2 seconds


Factory set to safe max temp: Factory set to 41°C

Adjustable maximum temperature for on-site conditions

ACCESSORIES

Wide range of accessories available at www.mirashowers-store.co.uk

TECH DRAWINGS

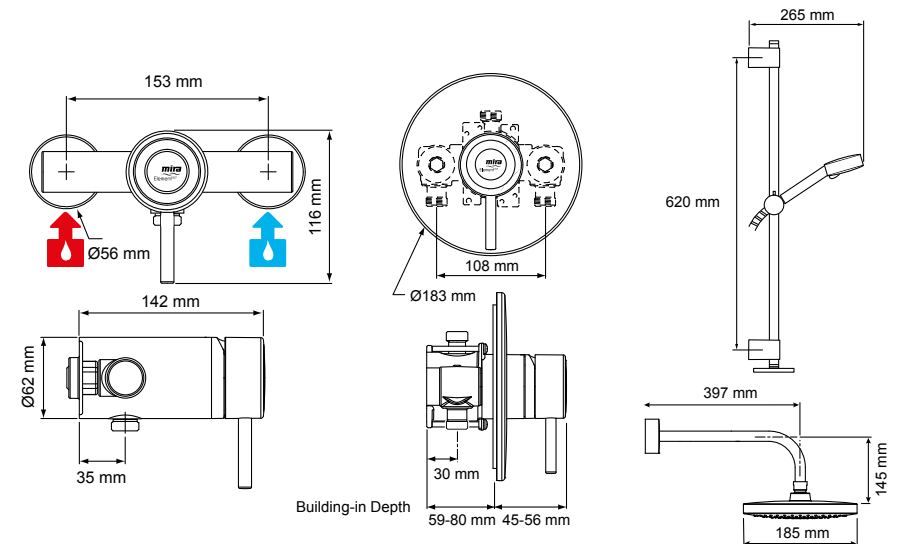

See Magni-Flo™ in action by scanning this QR code

