




CAVO - 500

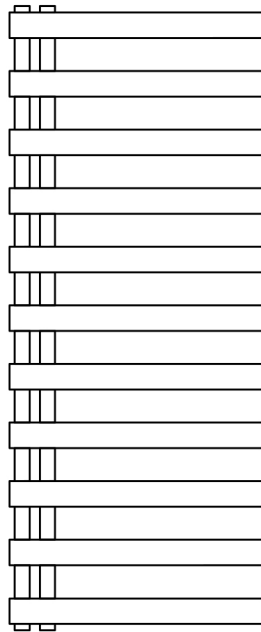


Front View

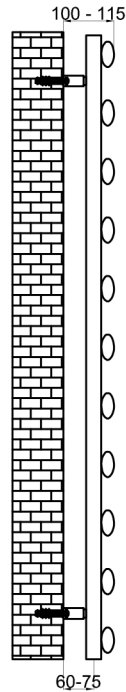

Side View

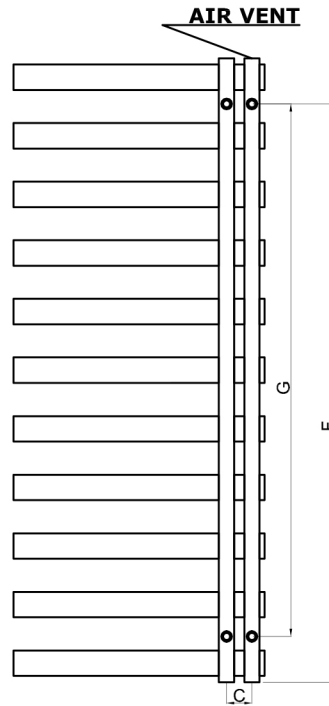

Back View



Top View

SUPPLIED INSTALLATION ACCESSORIES



SCREW 4 PCS



WALL PLUG 4 PCS



BRACKET 4 PCS



GRAB SCREW 4 PCS



ALIEN KEY 1 PCS




AIR VENT 1 PCS



BLANKING PLUG 1 PCS

MATERIAL DETAILS



-Vertical Mounting
-Optional 304 QUALITY STAINLESS STEEL TOWEL RADIATOR: (RNS-CV512 : CAVO RADIATORS)
-POLISHED & BRUSHED
-Max Operational Pressure: 10 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm

Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H mm	W mm	D mm	C mm	S mm	F mm	G mm	- L	- kg	Watt - BTU/hr (Δ50°)
CAVO 530 X 500	RNS-CV505P	530	500	95	50	50	440	350	2.79	3.90	338 - 1154
CAVO 880 X 500	RNS-CV508P	880	500	95	50	50	790	700	4.22	6.26	542 - 1847
CAVO 1230 X 500	RNS-CV512P	1230	500	95	50	50	1140	1050	5.81	8.70	728 - 2482
CAVO 1580 X 500	RNS-CV518P	1580	500	95	50	50	1490	1400	6.42	11.19	948 - 3232
CAVO 530 X 500	RNS-CV505B	530	500	95	50	50	440	350	2.79	3.90	338 - 1154
CAVO 880 X 500	RNS-CV508B	880	500	95	50	50	790	700	4.22	6.26	542 - 1847
CAVO 1230 X 500	RNS-CV512B	1230	500	95	50	50	1140	1050	5.81	8.70	728 - 2482
CAVO 1580 X 500	RNS-CV518B	1580	500	95	50	50	1490	1400	6.42	11.19	948 - 3232

REINA