



FLOX

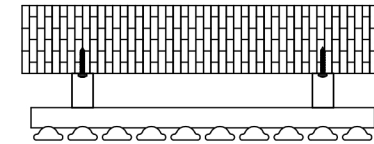

TOP VIEW

SUPPLIED INSTALLATION ACCESSORIES

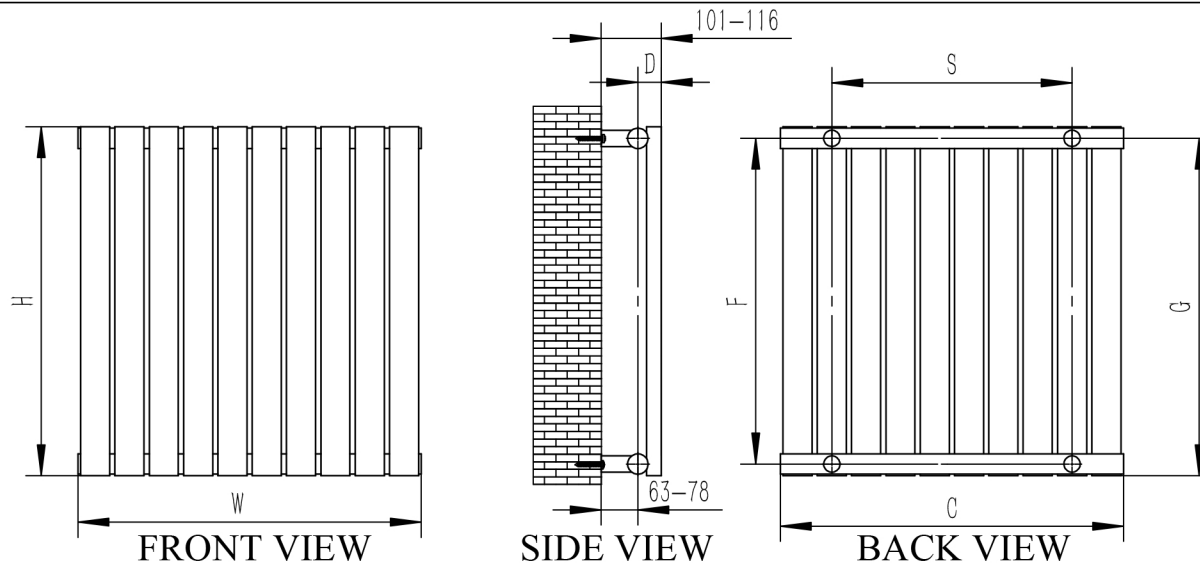


ALLEN KEY 1PCS



SMALL SCREW 4PCS



WALL PLUG 4PCS



POLOSHING CLOTH (Brush)1PCS



AIR VENT 1PCS



SCREW 4PCS




BUCKET 4PCS



WALL BUCKET 4PCS

- Vertical Mounting
- Optional 304 QUALITY STAINLESS STEEL RADIATOR (FLOX RADIATOR)
- POLISHED
- MAX Operational Pressure: 10Bar
- Inlet/Outlet: 1/2"Female Pipe Thread
- All Dimensions are in mm



Product Name	Product Code	Height	Width	Thickn ess	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger To Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight
		H	W	D	C	S	F	G	-	-
		mm	mm	mm	mm	mm	mm	mm	mm	L
	RNS-FTX060041SP	600	413	56	413	236	560	580	3.48	4.7
	RNS-FTX060059SP	600	590	56	590	413	560	580	4.97	6.7
	RNS-FTX060082SP	600	826	56	826	649	560	580	6.96	9.4
	RNS-FTX060100SP	600	1003	56	1003	826	560	580	8.46	11.4
	RNS-FTX060118SP	600	1180	56	1180	1003	560	580	9.95	13.4

REINA