




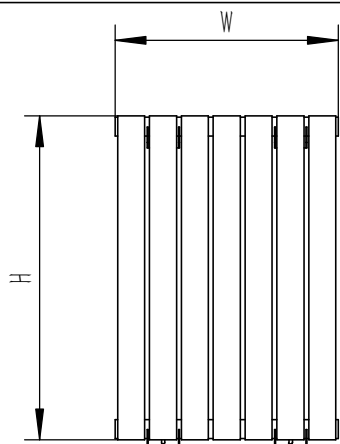

FRONT VIEW

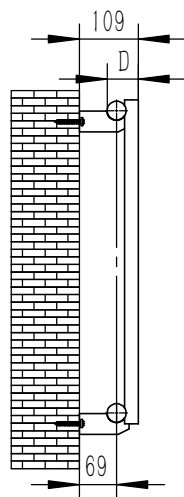


SIDE VIEW

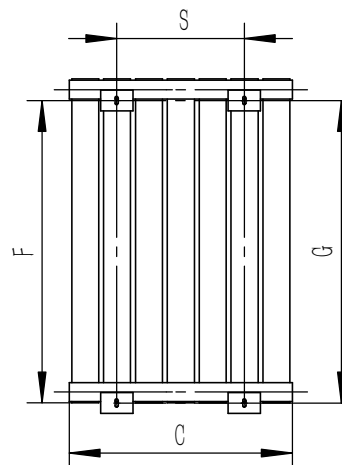

BACK VIEW



NEROX

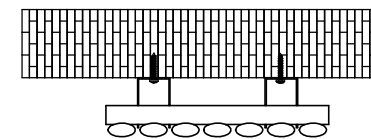

TOP VIEW

SUPPLIED INSTALLATION ACCESSORIES

- Vertical Mounting
- Optional 304 QUALITY STAINLESS STEEL RADIATOR (RNS-NRX610P/S:NEROX RADIATOR)
- POLISHED
- MAX Operational Pressure:10Bar
- Inlet/Outlet:1/2"Female Pipe Thread
- All Dimensions are in mm



BLANKING PLUG 1PCS WALL PLUG 4PCS



AIR VENT 1PCS



SCREW 4PCS



BRACKET 4PCS



SPACER 8PCS

Product Name	Product Cude	Height	Width	Thick ness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger To Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Wat-Btu/hr(Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
RNS-NRX607P/S	NEROX S-600/7 P+B	600	413	58	413	236	560	560	4.3	4.7	285-972
RNS-NRX610P/S	NEROX S-600/10 P+B	600	590	58	590	413	560	560	6.2	6.7	407-1388
RNS-NRX614P/S	NEROX S-600/14 P+B	600	826	58	826	649	560	560	8.7	9.4	570-1945
RNS-NRX617P/S	NEROX S-600/17 P+B	600	1003	58	1003	826	560	560	10.5	11.4	692-2361
RNS-NRX620P/S	NEROX S-600/20 P+B	600	1180	58	1180	1003	560	560	12.4	13.4	814-2777
RNS-NRX1805P/S	NEROX S-1800/5 P+B	1800	295	58	295	118	1760	1760	8.3	9.1	548-1870
RNS-NRX1807P/S	NEROX S-1800/7 P+B	1800	413	58	413	236	1760	1760	11.6	12.7	767-2617
RNS-NRX1808P/S	NEROX S-1800/8 P+B	1800	472	58	472	295	1760	1760	13.2	14.5	876-2990
RNS-NRX1809P/S	NEROX S-1800/9 P+B	1800	531	58	531	354	1760	1760	14.9	16.3	986-3364

www.reinadesign.co.uk

info@atayglobal.com

TEL:+44 1787 238540

REINA