

EL192 Concealed Concentric Thermostatic Shower Valve

Barcode 7081248883214

Product Code EL192

ConstructionBrass Body (CuZn38Pb18)FinishesChrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min. 0.5 bar, Max. 6.0 bar

Plumbing Systems Suitable for all plumbing systems, preferably balanced.Min. supply pressure

differential requirement is 5:1


Standards Complies with BSEN 1111

Certification Manufactured to comply with TMV2

CartridgeThermostaticFittingEscutcheon

Packaging 52 x 49 x 34cm / carton (8 boxes / carton)

Guarantee10 years against manufacturing faults (excluding serviceable parts). **Additional Information**1. Temperature: Pre-set 38°C, with push button override to 48°C.
2. Automatic shut off in the event of hot or cold water supply failure.

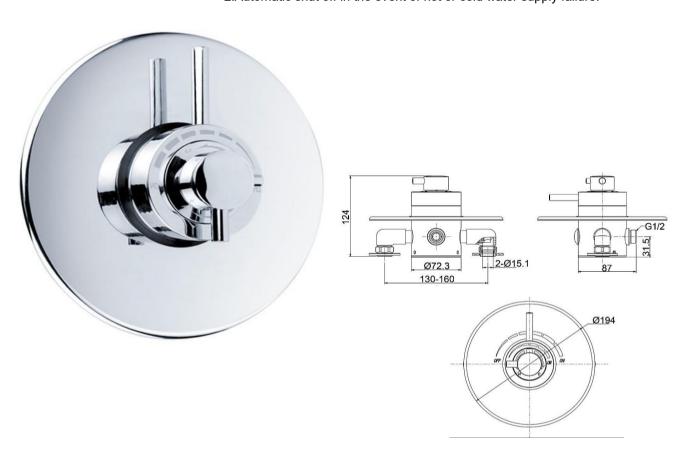

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
EL192	2.3	4.7	-	8.4	11.7	-	-	19.0	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.