

# SAGITTARIUS

Construction	Brass & stainless steel
Finishes	Chrome plated to BS EN 248
Product Type	Commercial
Aerator	Anti splash & flow restrictor
Water Pressure	Min. 0.5 bar, Max. 6.0 bar
Plumbing Systems	Suitable for all plumbing systems
Standards	Complies with EN60529
Certification	CE , ROHS , IP44
Power	Voltage: DC6V or AC220V-240V (6V Output) Power consumption: ≈0.3mW
Power Options	Choice of : i. Batteries only DC (4 x AA batteries) ii. Mains power AC supply only iii. Both Mains AC + Batteries DC (backup) connected at the same time
Silent Consumption	0.003mW
Fitting	Control box: Diameter of 'inlet' pipe: G1/2" Control box: Diameter of 'outlet' pipe: G1/2" Suitable for cold or premixed water
Sensing distance	6 - 30 cm
Respond time	1 Second
Noise Class	1
Packaging	55x38x33.5cm/carton(10pcs), Bx size: 33x18.5x11cm, Weight: 2.1kg
Guarantee	3 years against manufacturing faults (excluding serviceable parts).
Additional Information	i. Vandal and scratch resistant sensor window ii. This tap is compatible with our new IRC Sensor Remote Control (Sold separately) iii. Suitable for battery installation, and for cold or premixed water. iv. Maximum operational temperature 45°C.

## DELUX WALL MOUNTED BASIN MIXER IR/706/C



### Flow Rates (Litres per minute)


System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
IR/706/C	-	2.37	-	8.35	11.95	-	18.35	27.00	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029

EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

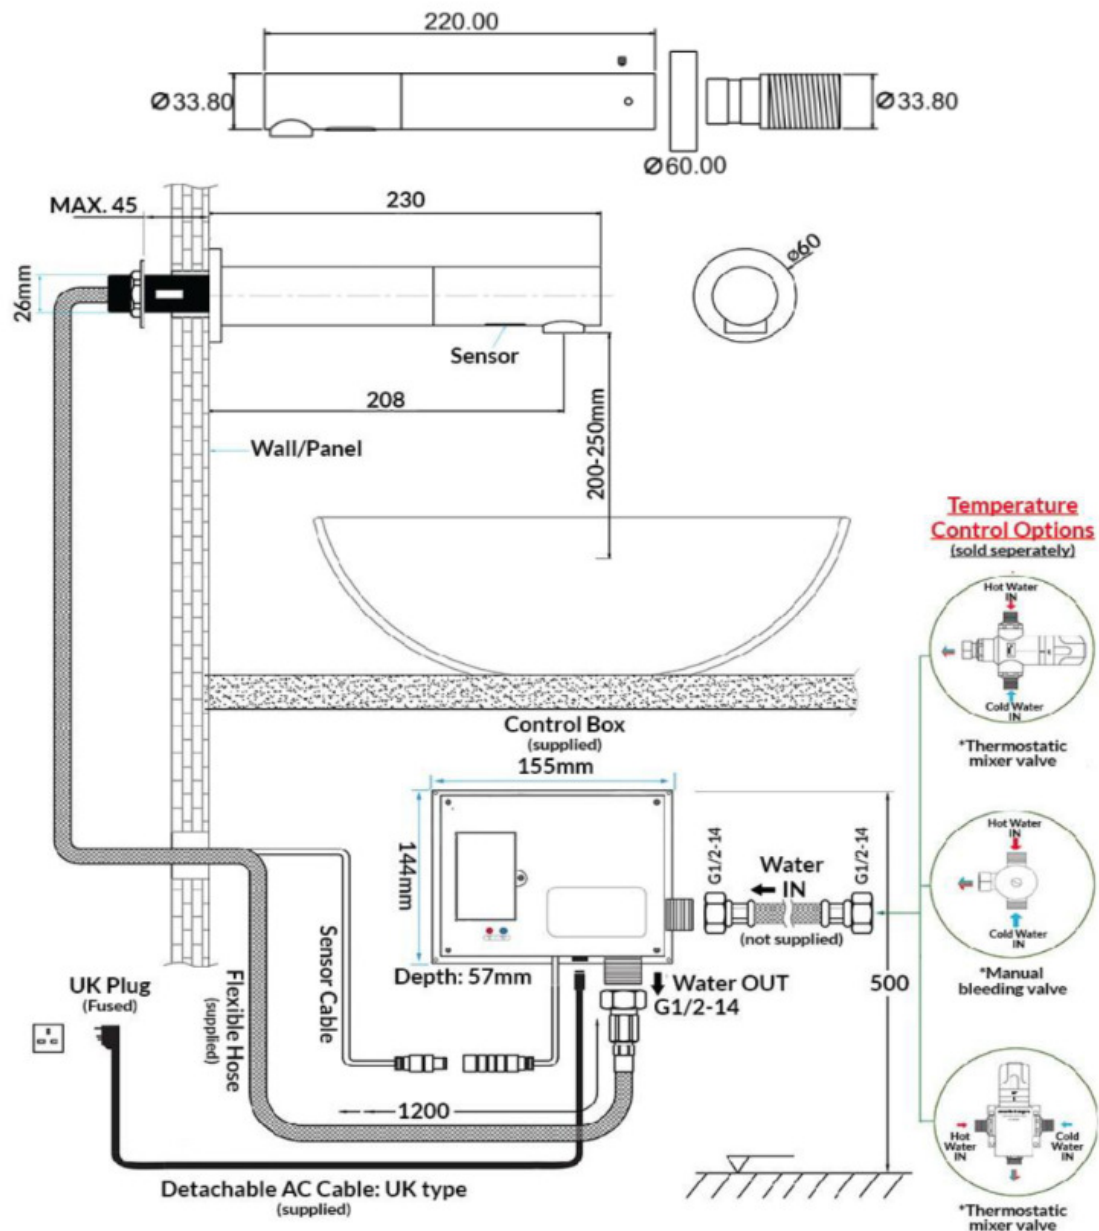

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-  
 SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029  
 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK