SAGITTARIUS

TAPS & SHOWERING

ConstructionBrass Body (CuZn40Pb18)FinishesChrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min. 0.2 bar, Max. 6.0 bar

Plumbing Systems
Standards
Standards
Complies with BS5412, BS EN200
Certification
Manufactured to comply with WRAS


Cartridge 1/4 Turn 1/2" Ceramic Disc Valves
Fitting M10 x 15mm flexible connection pipes

Packaging 41.5 x 38 x 27cm / carton (10 boxes / carton)

Guarantee 10 years against manufacturing faults (excluding serviceable parts).

CANTERBURY LEVER MONO
SINK MIXER CHROME
CO/552/C



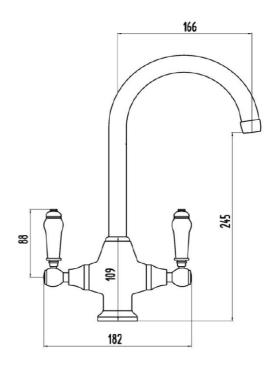

Flow Rates (Litres per minute)

Tion rates (Elifob pol Hilliato)										
System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
CO552	0.1	4.5	-	10.1	15.8	20.0	23.0	28.8	,	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice