


SAGITTARIUS

TAPS & SHOWERING

BLADE EXP THERMOSTATIC VALVE AND RIGID RISER BL/248/C

Construction	Brass Body CuZn40Pb2, EN CW617N (equivalent to BS CZ122)
Finishes	Chrome plated to BS EN 248
Product Type	Contemporary
Water Pressure	Min. 0.5 bar, Max. 6.0 bar
Plumbing Systems	Suitable for all plumbing systems.
Standards	Complies with BS 5412, BS EN200 & BS EN 1111
Certification	Manufactured to comply with WRAS
Cartridge	triduon® thermostatic
Fitting	Escutcheon
Packaging	86 x 42 x 46cm / carton (4 boxes / carton)
Guarantee	10 years against manufacturing faults (excluding serviceable parts).
Additional Information	1. Temperature : Pre-set 38°C 2. Automatic shut off in the event of hot or cold water supply failure. 3. Stainless steel adjustable riser rail 4. Shower head : 250mm SS304, Air Induction, Ultra thin head 5. Shower handset : Chrome , ABS 6. Shower hose : PVC , 1.5m. 7. WALL FLUSHING VALVE installation flush with the wall means that the connections are elegantly concealed.

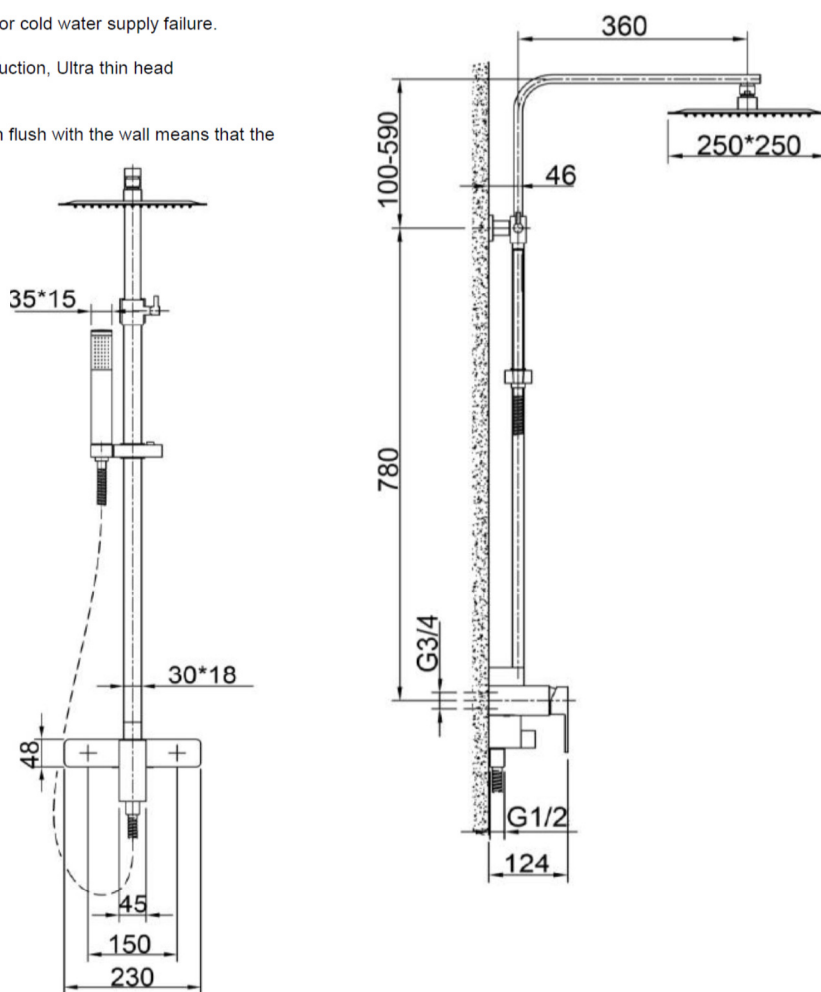

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
BL248	-	4.5	-	8.5	14.1	-	-	24.1	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029

EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK