


# SAGITTARIUS


## TAPS & SHOWERING

Construction Brass  
 Dimensions 180mm X 165mm  
 Working pressure HP/LP/COMBI  
 Parts Ceramic Lever  
 Lever Handles  
 Cold valve 22mm Ceramic disc valve  
 Hot valve 22mm ceramic disc valve  
 Heads, collars 3/4 inch, seating washer 22mm, plastic back nut 22mm, under tap seating O ring, chrome elbow union nuts & washers x2, bath mounted shrouds, cranked leg elbows.

### KENSINGTON LEVER DELUXE BATH FILLER CHROME KL/204/C

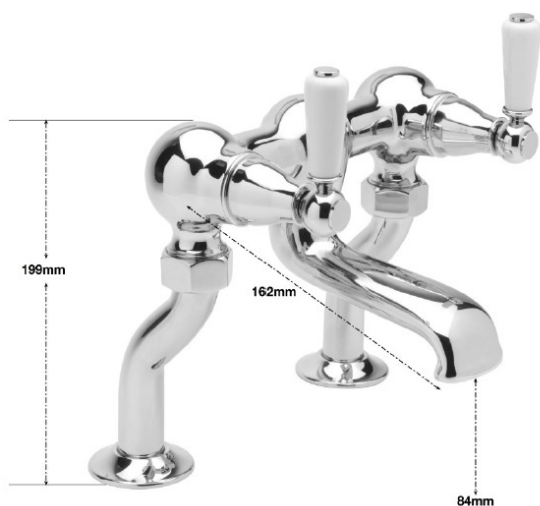

ADJUSTABLE CENTRES 120mm TO 240mm

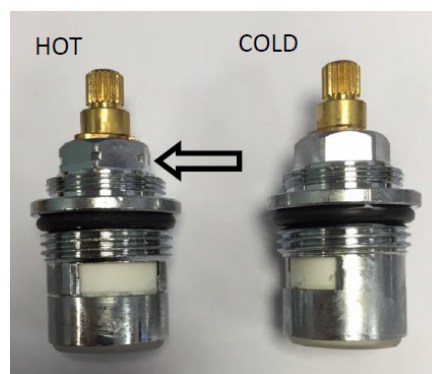

#### List of Components

TAP

KENSINGTON CRANKED LEGS 15mm X2

Max Flow Hot Tap

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
4.5	7	9.5	11.5	17

Max Flow Cold Tap

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
4.5	7	9	10.5	16

Max Flow blend 45°C

0.2 bar	0.3bar	0.5 bar	1 bar	3 bar
10	16	20	26	32

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-  
 SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029  
 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK