



SAGITTARIUS

TAPS & SHOWERING

Construction Brass
Dimensions 315mm X 180mm X 207mm
Working pressure HP/LP/COMBI
Parts Ceramic Lever
 Lever Handles
 Cold Valve –22mm Ceramic disc quarter turn
 Hot Valve—22mm Ceramic disc quarter turn
 Heads, Ceramic diverter lever, shower handset cradle,
 Hose 1.5m 1/2 x 1/2 conical, handset, handset ceramic
 insert, Kensington lever diverter unit, wall/ bath
 mounted shroud, plastic back nut 22mm, Seating
 washer 22mm, under tap seating O ring, diverter valve,
 diverter shuttle, cranked legs elbows.

KENSINGTON DELUXE WALL MOUNTED BSM CHROME KL/305/C

| List of Components |
|----------------------------|
| TAP |
| HOSE |
| HANDSET |
| CRADLE |
| KENSINGTON WALL ELBOWS X 2 |

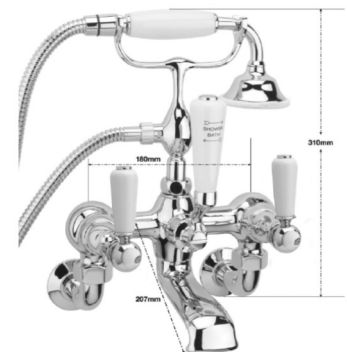

Max flow hot tap

4.5 | 6.8 | 8.5 | 10 | 16

Max Flow Cold Tap

4.5 | 7 | 8 | 10.2 | 15.5

Max Flow blend 45°C

10 | 14 | 20 | 26 | 31.5

Max Flow blend 42°C (Shower)

9 | 15.5 | 19 | 21

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-
 SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029
 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK